



艾普勒灯饰

Iprolux Lighting Co.,Ltd

NINGBO IPROLUX LIGHTING CO.,LTD

+86 13082949888

+86 (574) 88327796

Email:info@iprolux.net

Adress:No.77,Yunmo Road,Yunlong Town,Yinzhou District,Ningbo City,China.


www.iprolux.net



艾普勒灯饰

Iprolux Lighting Co.,Ltd

LED MIROR

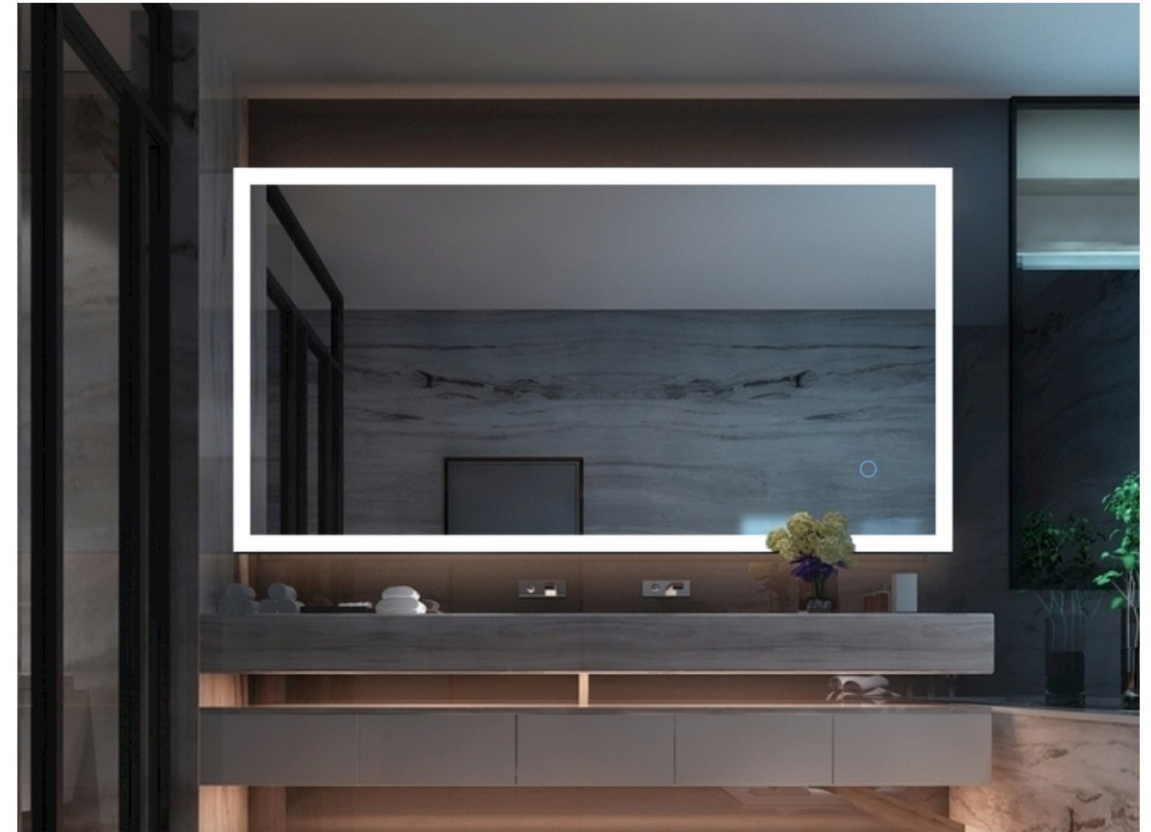

2021



NATURAL LIGHT

It will allow you to complete your beauty routine perfectly, regardless of the time of day.




WARM LIGHT

Turn on the warm lights at night, the light is soft without glare, which is helpful for sleeping.

Color Temperature

5500K



3000K


Ningbo Iprolux Lighting Co., Ltd, an innovative company, established in 2016 and specialized in the design and manufacture of bathroom smart mirror, dressing mirror and LED intelligent lighting. We have professional light source, structure and industrial designers team. This team have advanced product design concepts, and their continuous efforts, continuous improvement, the pursuit of perfection, continuous innovation, the pursuit of excellence enable customer to enjoy the high quality of life brought by intelligent lighting.

We adhere to the principle of "innovation for development, quality for survival". Our products have passed FCC, TUV certification, and in line with CE, VDE, ROHS, ERP standard. Our products are popular in domestic, European and American markets. Adhering to the advantages of original design, R&D and manufacturing, we are committed to improving brand building, service and market operation capabilities.

CONTENT



Round angle mirror
P01~P14

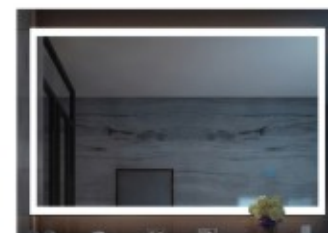

Square angle mirror
P15~P38



Round mirror
P39~P52



Dressing mirror
P53~P72

Defogging



Before defogging After defogging

LED makeup mirror
Copper-free rustproof silver mirror

Color temperature




white light



warm light



natural light

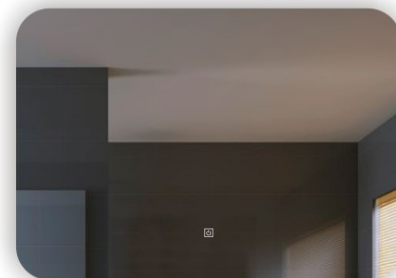

OPTIONAL FEATURES



CUSTOMIZED



HAND SWEEP



MUSIC



DEFOGGING



CCT CHANGE



31°C TEMPERATURE DISPLAY



BLUETOOTH





TIME DISPLAY



CALL

Basis function	Size(CM)	Weight(KG)	Power(W)	Lumen(lm)	Input Voltage(V)	CRI	IP	LED Life Span	Warranty	Certification
Touch Switch Dimming	50*70	7	30	1639	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	60*80	9	36	1927	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	70*90	11	41	2215	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	80*100	13	46	2503	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	90*110	16	51	2791	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	

Long life, not easy to turn black
Copper free silver mirror





00:00



OPTIONAL FEATURES



CUSTOMIZED



HAND SWEEP



MUSIC



DEFOGGING



CCT CHANGE



31°C TEMPERATURE DISPLAY



BLUETOOTH



TIME DISPLAY





CALL

Basis function	Size(CM)	Weight(KG)	Power(W)	Lumen(lm)	Input Voltage(V)	CRI	IP	LED Life Span	Warranty	Certification
Touch Switch Dimming	50*70	7	31	1710	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	60*80	9	36	1998	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	70*90	11	42	2286	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	80*100	13	47	2574	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	90*110	16	52	2862	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	

Long life, not easy to turn black
Copper free silver mirror

- Copper free, lead free lens
- 5mm high definition glass lens
- Silver ion coating
- Antioxidation technology
- Mirror grade sand blasting technology
- Waterproof coating








OPTIONAL FEATURES

- CUSTOMIZED
- HAND SWEEP
- MUSIC
- DEFOGGING
- CCT CHANGE
- 31°C TEMPERATURE DISPLAY
- BLUETOOTH
- TIME DISPLAY
- CALL

Basis function	Size(CM)	Weight(KG)	Power(W)	Lumen(lm)	Input Voltage(V)	CRI	IP	LED Life Span	Warranty	Certification
Touch Switch Dimming	50*70	7	28	1504	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	60*80	9	33	1792	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	70*90	11	38	2080	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	80*100	13	43	2368	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	90*110	15	48	2656	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	

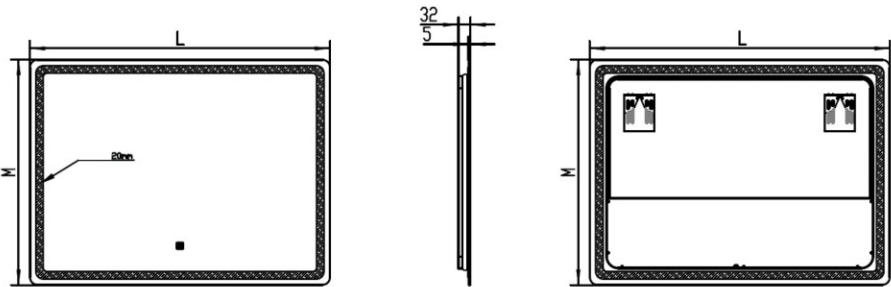

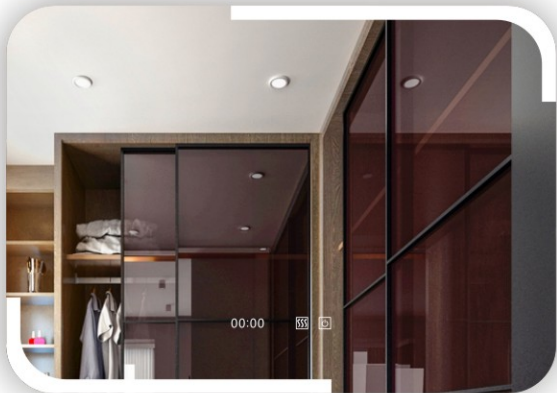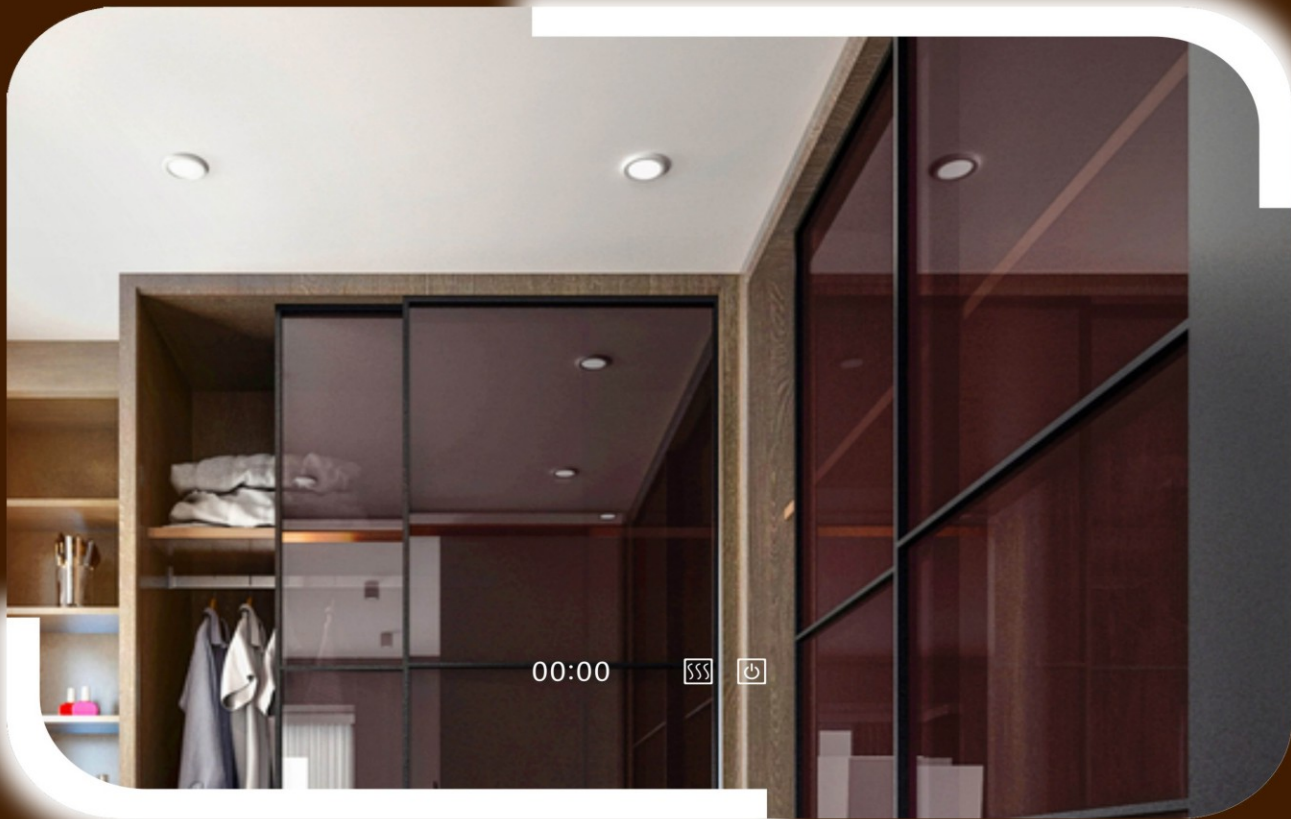




OPTIONAL FEATURES

- CUSTOMIZED
- HAND SWEEP
- MUSIC
- DEFOGGING
- CCT CHANGE
- 31°C TEMPERATURE DISPLAY
- BLUETOOTH
- TIME DISPLAY
- CALL

Basis function	Size(CM)	Weight(KG)	Power(W)	Lumen(lm)	Input Voltage(V)	CRI	IP	LED Life Span	Warranty	Certification
Touch Switch Dimming	50*70	8	13	800	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	60*80	10	13	800	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	70*90	12	13	800	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	80*100	15	13	800	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	90*110	17	13	800	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	

Long life, not easy to turn black
Copper free silver mirror

- Copper free, lead free lens
- 5mm high definition glass lens
- Silver ion coating
- Antioxidation technology
- Mirror grade sand blasting technology
- Waterproof coating





00:00



OPTIONAL FEATURES



CUSTOMIZED



HAND SWEEP



MUSIC



DEFOGGING



CCT CHANGE



TEMPERATURE DISPLAY



BLUETOOTH



TIME DISPLAY






CALL

Basis function	Size(CM)	Weight(KG)	Power(W)	Lumen(lm)	Input Voltage(V)	CRI	IP	LED Life Span	Warranty	Certification
Touch Switch Dimming	50*70	7	30	1564	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	60*80	9	36	1836	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	70*90	12	41	2108	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	80*100	14	46	2380	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	90*110	17	51	2652	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	

Long life,not easy to turn black
Copper free silver mirror

- Copper free, lead free lens
- 5mm high definition glass lens
- Silver ion coating
- Antioxidation technology
- Mirror grade sand blasting technology
- Waterproof coating

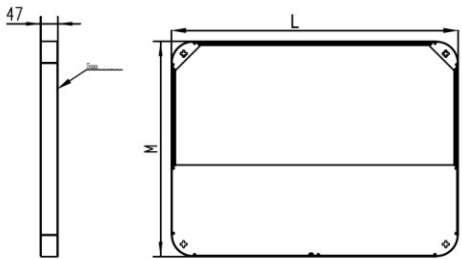

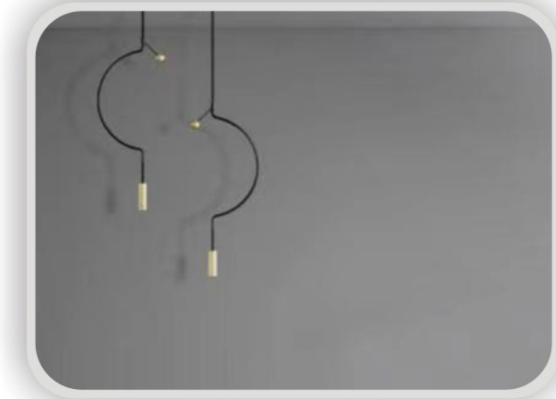

OPTIONAL FEATURES



CUSTOMIZED



HAND SWEEP



MUSIC



DEFOGGING



CCT CHANGE



TEMPERATURE DISPLAY



BLUETOOTH



TIME DISPLAY





CALL

Basis function	Size(CM)	Weight(KG)	Power(W)	Lumen(lm)	Input Voltage(V)	CRI	IP	LED Life Span	Warranty	Certification
Touch Switch Dimming	50*70	7	27	1467	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	60*80	9	32	1755	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	70*90	11	37	2043	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	80*100	13	43	2331	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	90*110	16	48	2619	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	

Long life,not easy to turn black
Copper free silver mirror

- Copper free,lead free lens
- 5mm high definition glass lens
- Silver ion coating
- Antioxidation technology
- Mirror grade sand blasting technology
- Waterproof coating

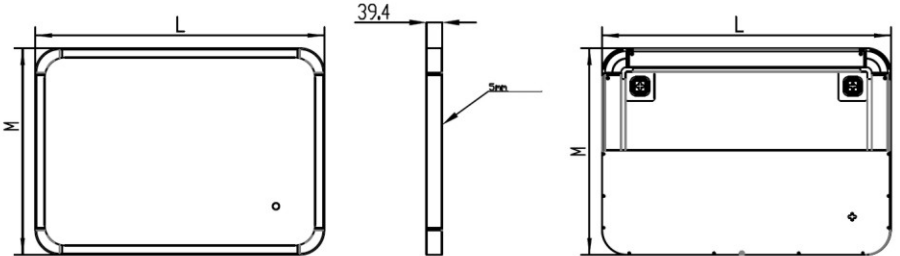

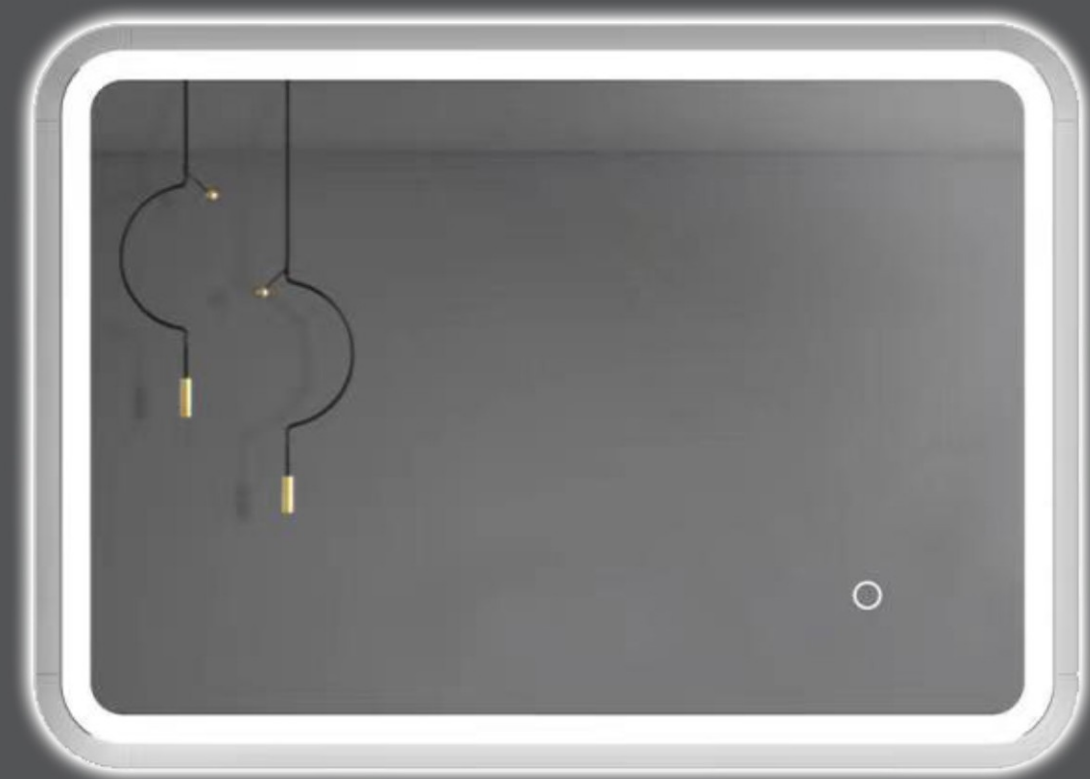

OPTIONAL FEATURES



CUSTOMIZED



HAND SWEEP



MUSIC



DEFOGGING



CCT CHANGE



TEMPERATURE DISPLAY



BLUETOOTH







TIME DISPLAY



CALL

Basis function	Size(CM)	Weight(KG)	Power(W)	Lumen(lm)	Input Voltage(V)	CRI	IP	LED Life Span	Warranty	Certification
Touch Switch Dimming	50*70	8	26	1392	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	60*80	10	32	1670	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	70*90	12	37	1948	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	80*100	14	42	2227	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	90*110	16	47	2505	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	





OPTIONAL FEATURES



CUSTOMIZED



HAND SWEEP



MUSIC



DEFOGGING



CCT CHANGE



TEMPERATURE DISPLAY



BLUETOOTH




TIME DISPLAY



CALL

Basis function	Size(CM)	Weight(KG)	Power(W)	Lumen(lm)	Input Voltage(V)	CRI	IP	LED Life Span	Warranty	Certification
Touch Switch Dimming	50*70	7	28	1313	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	60*80	9	32	1511	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	70*90	11	37	1773	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	80*100	13	40	1904	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	90*110	16	43	2068	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	

Aluminum Frame
Strong and durable, anti rust,
anti deformation, anti oxidation

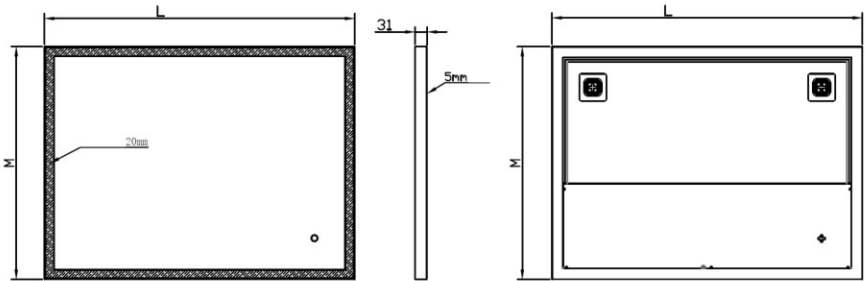




OPTIONAL FEATURES


-  CUSTOMIZED
-  HAND SWEEP
-  MUSIC
-  DEFOGGING
-  CCT CHANGE
-  31°C TEMPERATURE DISPLAY
-  BLUETOOTH
-  TIME DISPLAY
-  CALL

Basis function	Size(CM)	Weight(KG)	Power(W)	Lumen(lm)	Input Voltage(V)	CRI	IP	LED Life Span	Warranty	Certification
Touch Switch Dimming	50*70	7	27	1467	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	60*80	9	32	1755	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	70*90	11	37	2043	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	80*100	13	43	2331	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	90*110	16	48	2619	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	

Long life, not easy to turn black
Copper free silver mirror

- Copper free, lead free lens
- 5mm high definition glass lens
- Silver ion coating
- Antioxidation technology
- Mirror grade sand blasting technology
- Waterproof coating

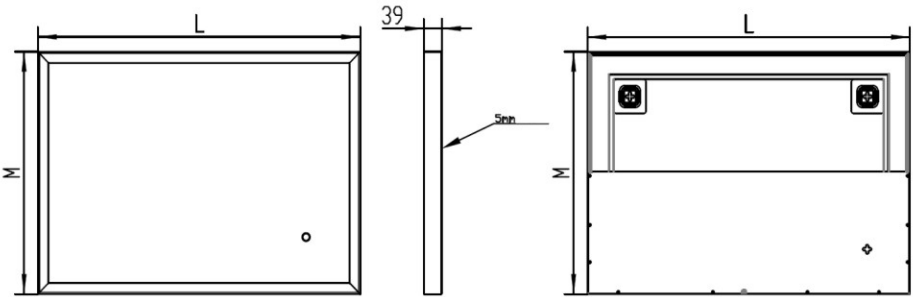

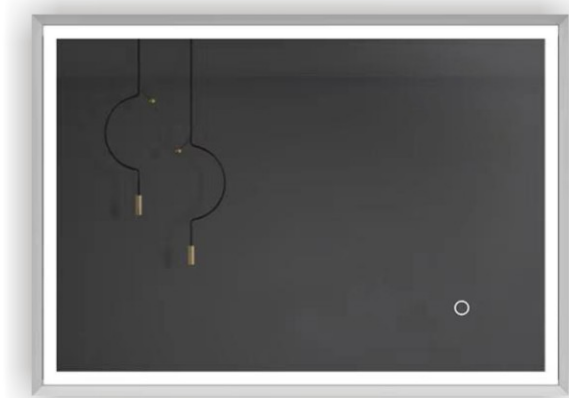


OPTIONAL FEATURES


-  CUSTOMIZED
-  HAND SWEEP
-  MUSIC
-  DEFOGGING
-  CCT CHANGE
-  31°C TEMPERATURE DISPLAY
-  BLUETOOTH
-  TIME DISPLAY
-  CALL

Basis function	Size(CM)	Weight(KG)	Power(W)	Lumen(lm)	Input Voltage(V)	CRI	IP	LED Life Span	Warranty	Certification
Touch Switch Dimming	50*70	8	26	1392	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	60*80	10	32	1670	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	70*90	12	37	1948	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	80*100	14	42	2227	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	90*110	16	47	2505	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	


Long life,not easy to turn black
Copper free silver mirror

- Copper free,lead free lens
- 5mm high definition glass lens
- Silver ion coating
- Antioxidation technology
- Mirror grade sand blasting technology
- Waterproof coating

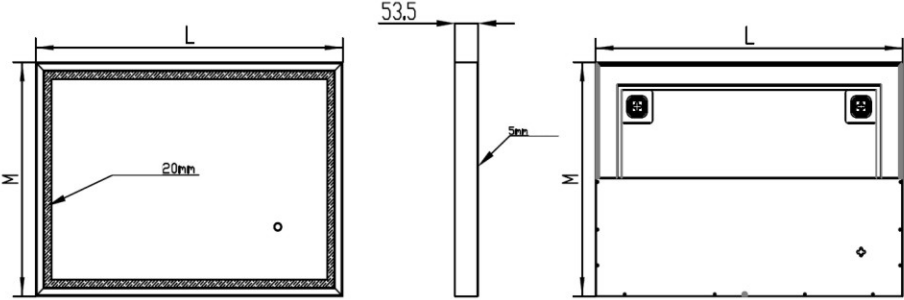

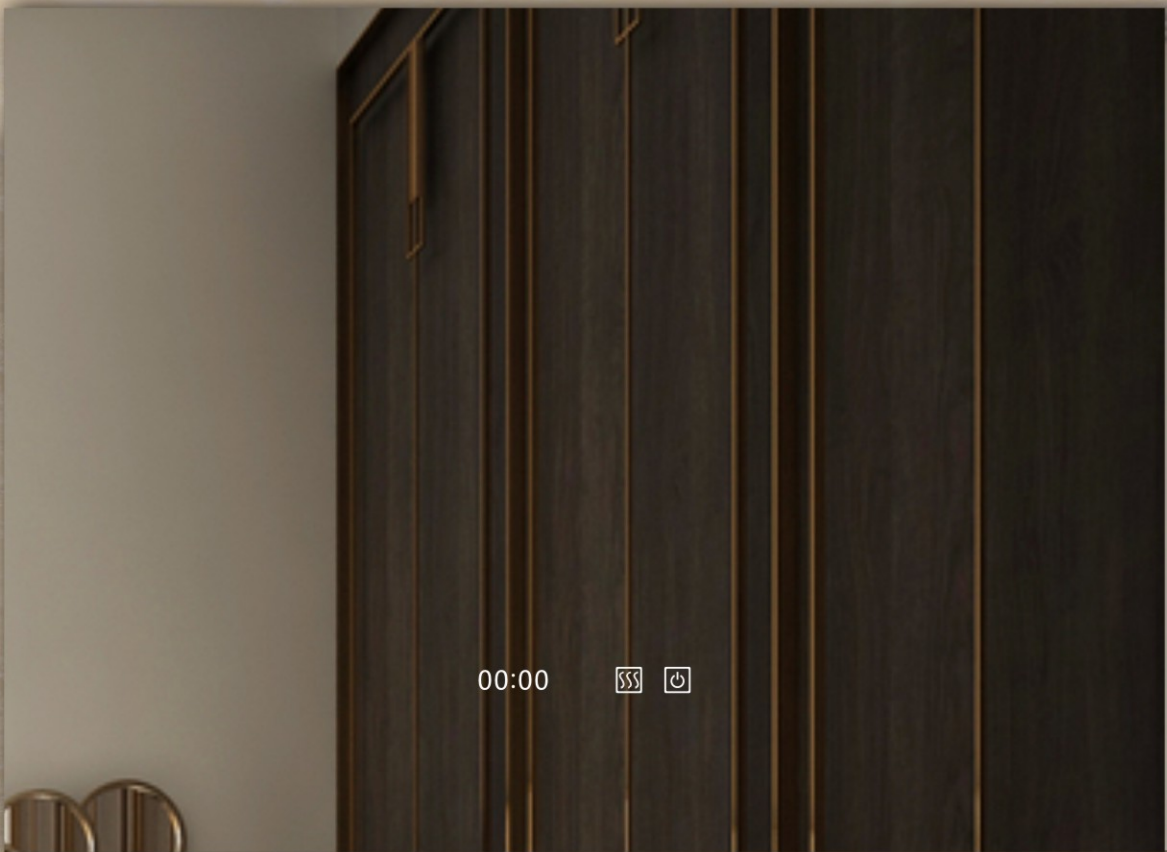

OPTIONAL FEATURES

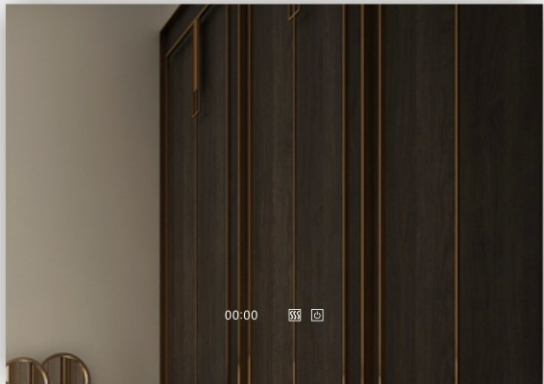

CUSTOMIZED



HAND SWEEP



MUSIC



DEFOGGING



CCT CHANGE



TEMPERATURE DISPLAY



BLUETOOTH








TIME DISPLAY



CALL

Basis function	Size(CM)	Weight(KG)	Power(W)	Lumen(lm)	Input Voltage(V)	CRI	IP	LED Life Span	Warranty	Certification
Touch Switch Dimming	50*70	7	15	709	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	60*80	9	19	824	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	70*90	11	21	939	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	80*100	13	23	1054	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	90*110	16	26	1170	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	




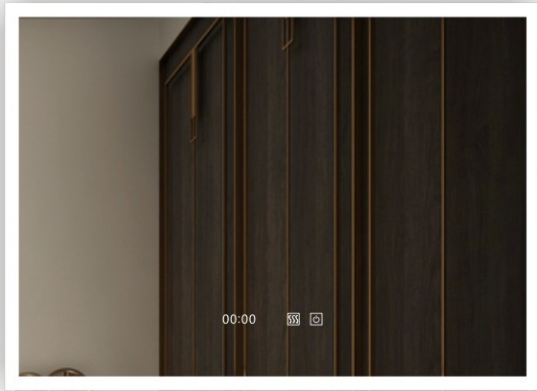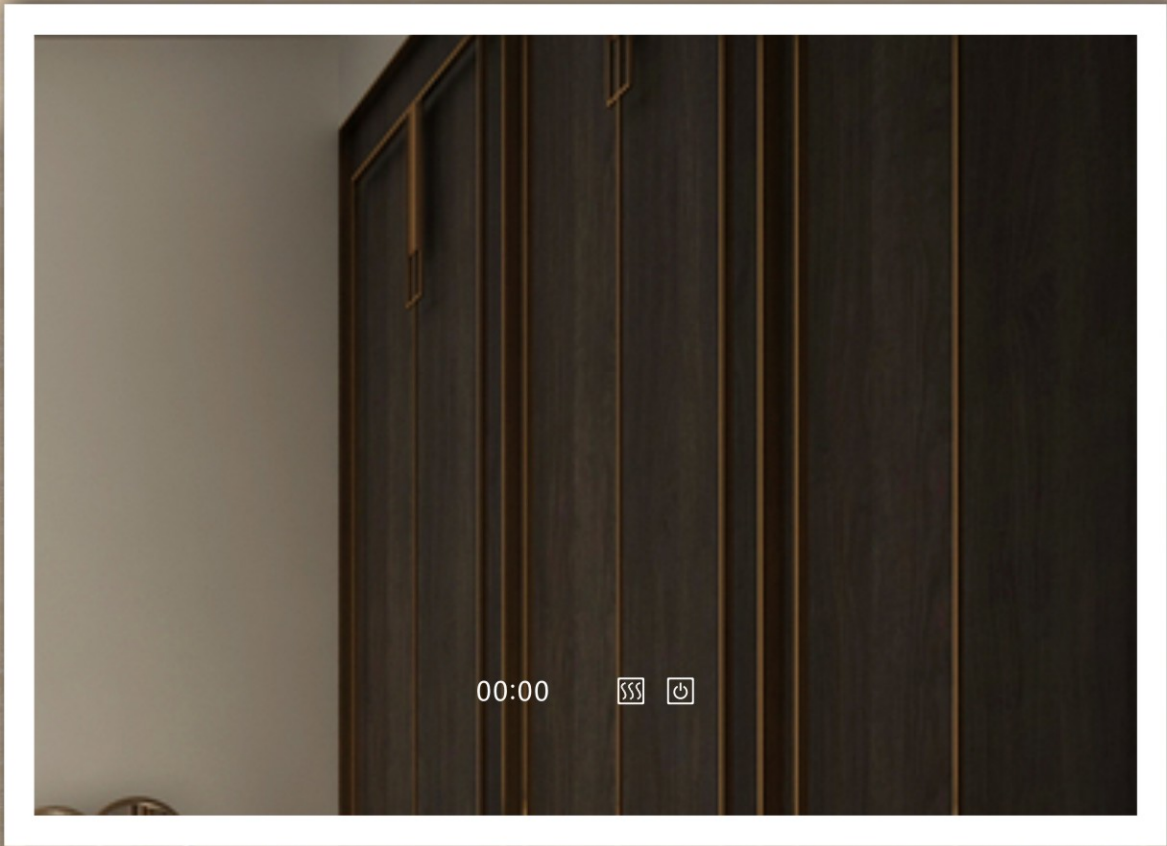

OPTIONAL FEATURES

- **CUSTOMIZED**
- **HAND SWEEP**
- **MUSIC**
- **DEFOGGING**
- **CCT CHANGE**
- **31°C** **TEMPERATURE DISPLAY**
- **BLUETOOTH**
- **TIME DISPLAY**
- **CALL**

Basis function	Size(CM)	Weight(KG)	Power(W)	Lumen(lm)	Input Voltage(V)	CRI	IP	LED Life Span	Warranty	Certification
Touch Switch Dimming	50*70	7	28	1504	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	60*80	9	33	1792	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	70*90	11	38	2080	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	80*100	13	43	2368	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	90*110	16	48	2656	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	

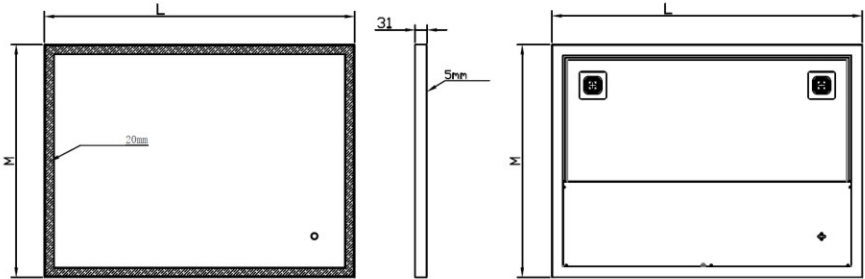



OPTIONAL FEATURES



CUSTOMIZED



HAND SWEEP



MUSIC



DEFOGGING



CCT CHANGE



TEMPERATURE DISPLAY



BLUETOOTH




TIME DISPLAY



CALL



Basis function	Size(CM)	Weight(KG)	Power(W)	Lumen(lm)	Input Voltage(V)	CRI	IP	LED Life Span	Warranty	Certification
Touch Switch Dimming	50*70	7	31	1710	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	60*80	9	37	1998	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	70*90	11	42	2286	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	80*100	13	47	2574	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	90*110	16	52	2862	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	

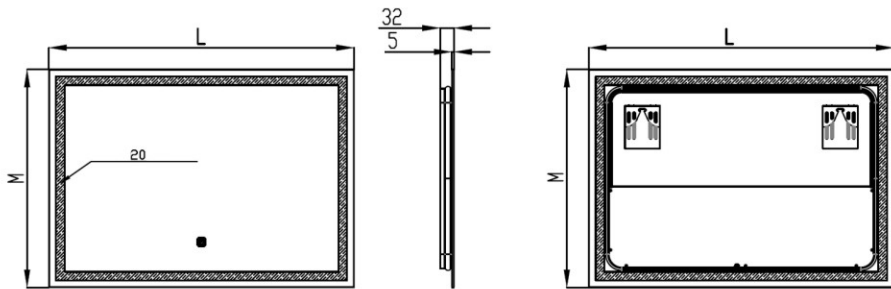





OPTIONAL FEATURES




-  CUSTOMIZED
-  HAND SWEEP
-  MUSIC
-  DEFOGGING
-  CCT CHANGE
-  31°C TEMPERATURE DISPLAY
-  BLUETOOTH
-  TIME DISPLAY
-  CALL

Basis function	Size(CM)	Weight(KG)	Power(W)	Lumen(lm)	Input Voltage(V)	CRI	IP	LED Life Span	Warranty	Certification
Touch Switch Dimming	50*70	7	19	787	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	60*80	9	21	902	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	70*90	11	23	1018	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	80*100	13	26	1133	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	90*110	16	29	1248	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	

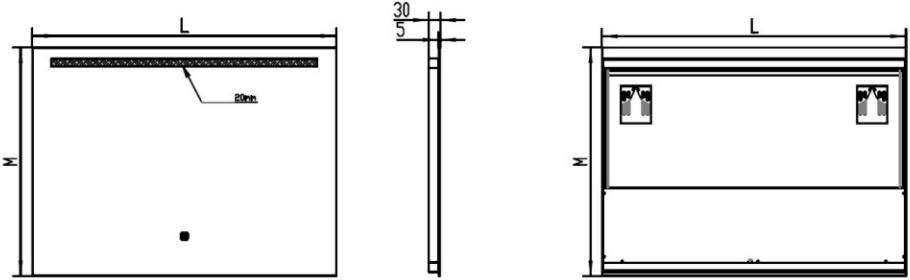

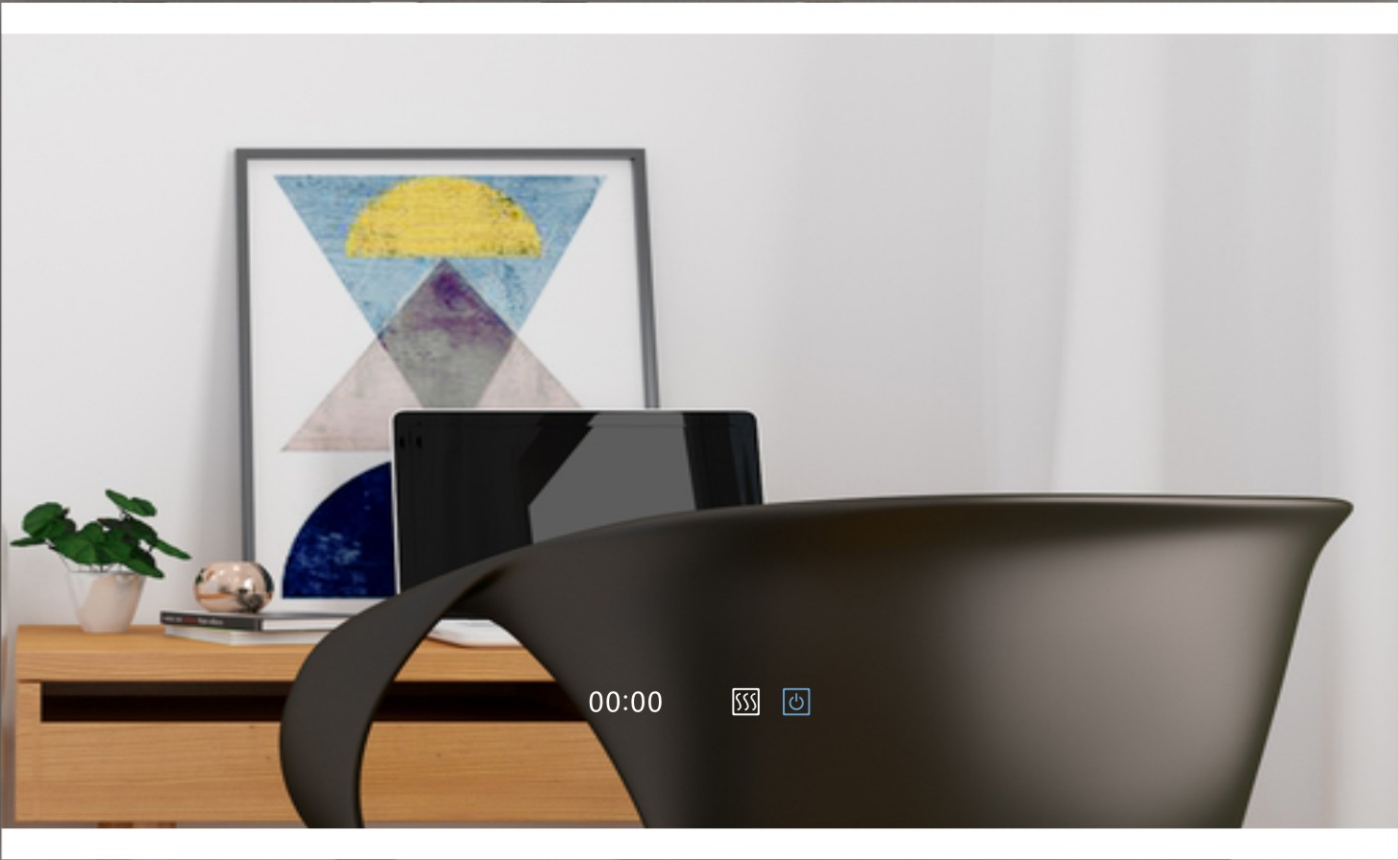

OPTIONAL FEATURES

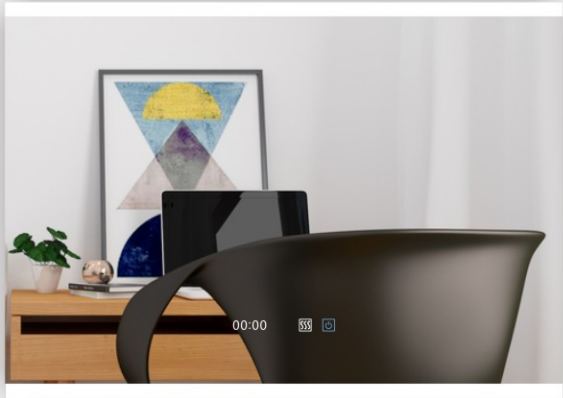


- CUSTOMIZED
- HAND SWEEP
- MUSIC
- DEFOGGING
- CCT CHANGE
- 31°C TEMPERATURE DISPLAY
- BLUETOOTH
- TIME DISPLAY
- CALL

Basis function	Size(CM)	Weight(KG)	Power(W)	Lumen(lm)	Input Voltage(V)	CRI	IP	LED Life Span	Warranty	Certification
Touch Switch Dimming	50*70	7	17	787	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	60*80	9	19	902	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	70*90	11	22	1018	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	80*100	13	25	1133	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	90*110	16	28	1248	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	

Long life,not easy to turn black
Copper free silver mirror

- Copper free,lead free lens
- 5mm high definition glass lens
- Silver ion coating
- Antioxidation technology
- Mirror grade sand blasting technology
- Waterproof coating

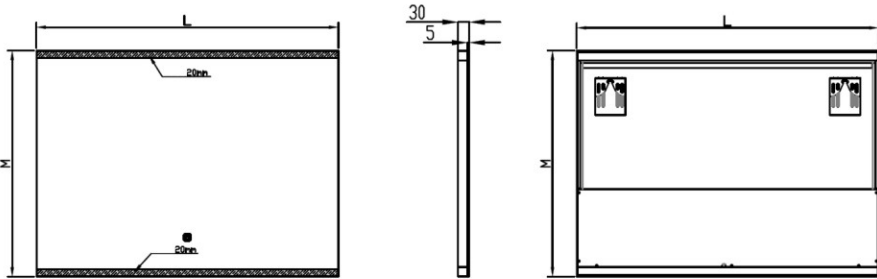



OPTIONAL FEATURES



CUSTOMIZED



HAND SWEEP



MUSIC



DEFOGGING



CCT CHANGE



31°C TEMPERATURE DISPLAY




BLUETOOTH



TIME DISPLAY






CALL

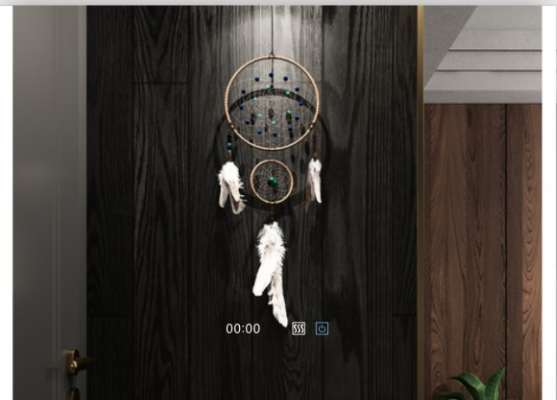


Basis function	Size(CM)	Weight(KG)	Power(W)	Lumen(lm)	Input Voltage(V)	CRI	IP	LED Life Span	Warranty	Certification
Touch Switch Dimming	50*70	7	13	557	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	60*80	9	15	672	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	70*90	12	18	787	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	80*100	15	21	902	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	90*110	17	23	1018	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	




LED two-sided glow
Makeup mirror
atmosphere lamp integrated design
Front panel is a mirror front light design,
high CRI, can restore facial makeup;
The side panel light is designed with
ambient light, and the light is soft.



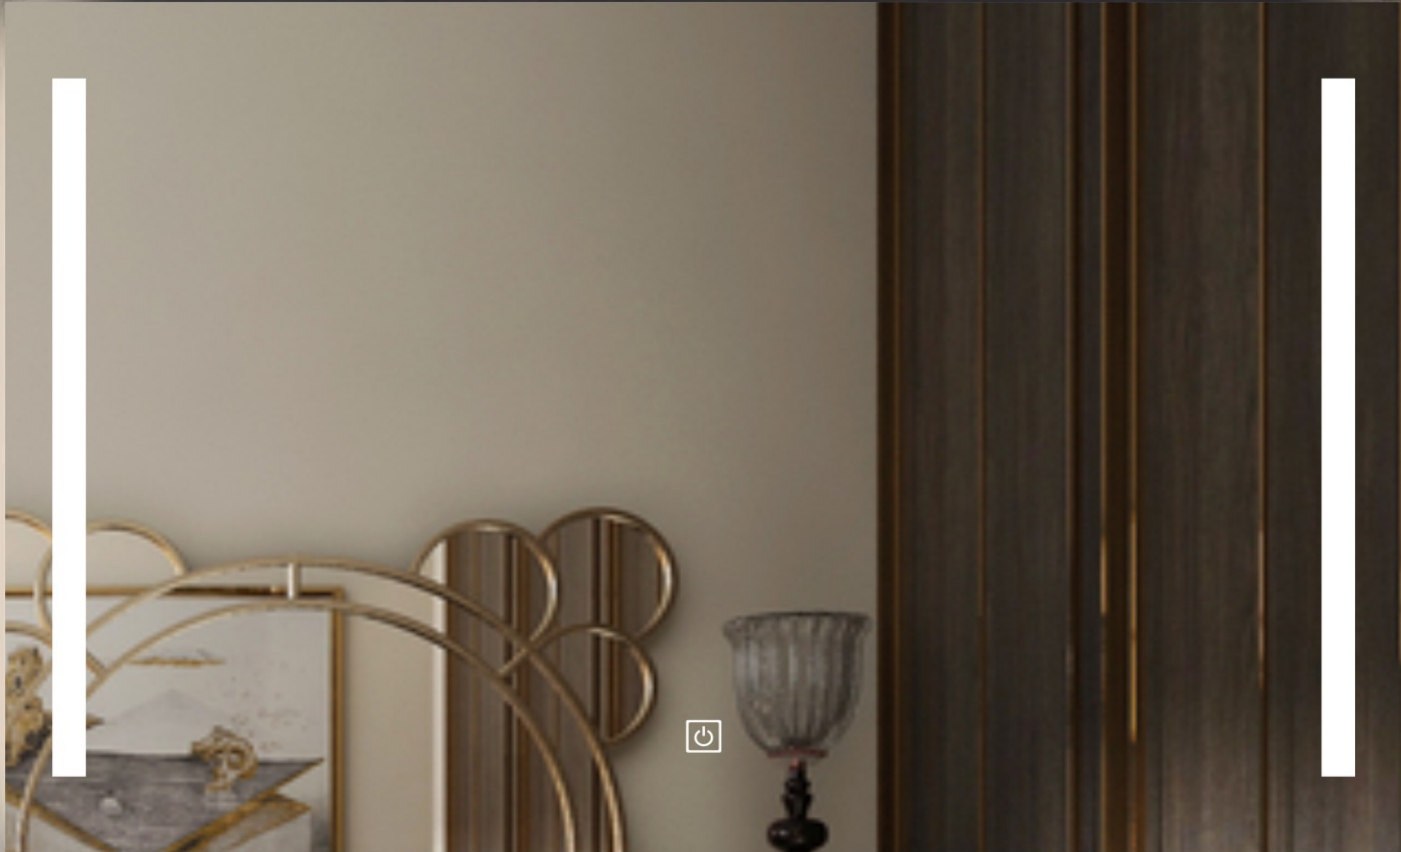

OPTIONAL FEATURES

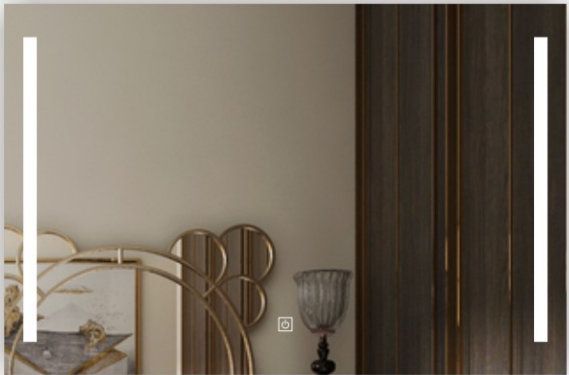



- CUSTOMIZED
- DEFOGGING
- BLUETOOTH
- HAND SWEEP
- CCT CHANGE
- TIME DISPLAY
- MUSIC
- 31°C TEMPERATURE DISPLAY
- CALL

Basis function	Size(CM)	Weight(KG)	Power(W)	Lumen(lm)	Input Voltage(V)	CRI	IP	LED Life Span	Warranty	Certification
Touch Switch Dimming	50*70	7	13	557	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	60*80	9	15	672	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	70*90	11	18	787	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	80*100	13	21	902	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	90*110	16	23	1018	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	

Long life,not easy to turn black
Copper free silver mirror

- Copper free,lead free lens
- 5mm high definition glass lens
- Silver ion coating
- Antioxidation technology
- Mirror grade sand blasting technology
- Waterproof coating

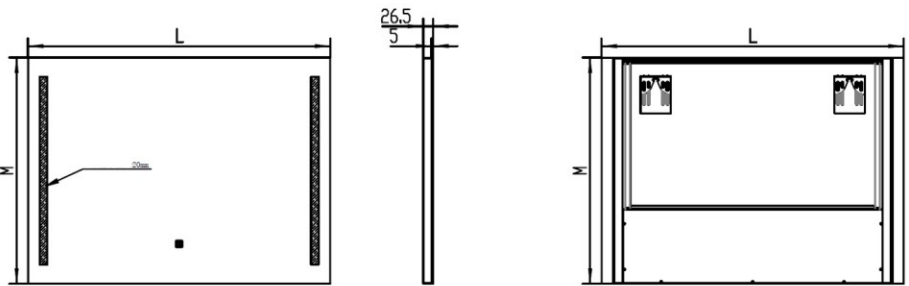


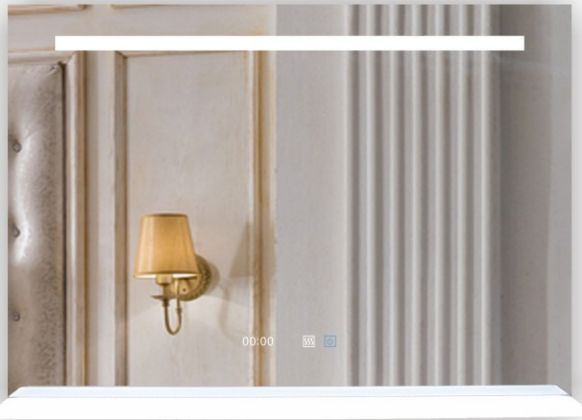


OPTIONAL FEATURES

- CUSTOMIZED
- HAND SWEEP
- MUSIC
- DEFOGGING
- CCT CHANGE
- 31°C TEMPERATURE DISPLAY
- BLUETOOTH
- TIME DISPLAY
- CALL

Basis function	Size(CM)	Weight(KG)	Power(W)	Lumen(lm)	Input Voltage(V)	CRI	IP	LED Life Span	Warranty	Certification
Touch Switch Dimming	50*70	9	17	835	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	60*80	10	19	964	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	70*90	13	22	1094	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	80*100	15	25	1223	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	90*110	18	27	1353	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	

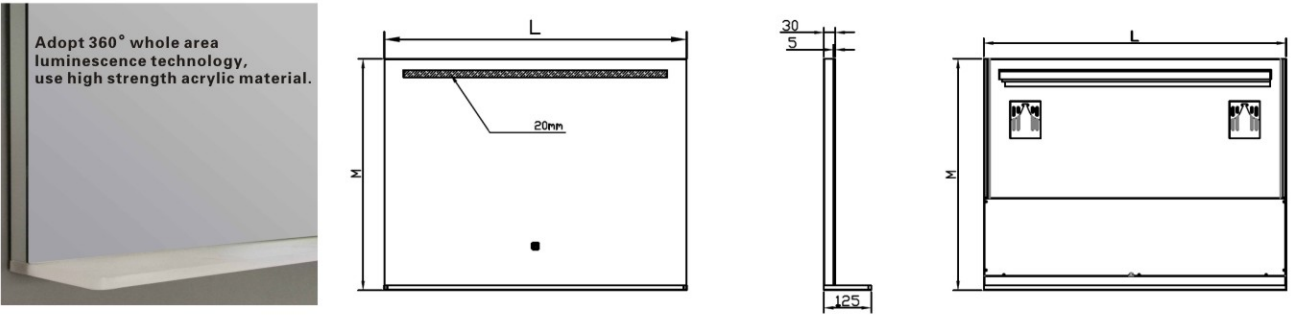

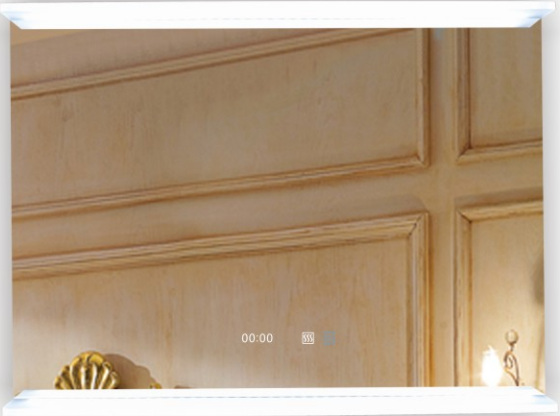


OPTIONAL FEATURES

- CUSTOMIZED
- HAND SWEEP
- MUSIC
- DEFOGGING
- CCT CHANGE
- 31°C TEMPERATURE DISPLAY
- BLUETOOTH
- TIME DISPLAY
- CALL

Basis function	Size(CM)	Weight(KG)	Power(W)	Lumen(lm)	Input Voltage(V)	CRI	IP	LED Life Span	Warranty	Certification
Touch Switch Dimming	50*70	9	18	972	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	60*80	12	21	1116	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	70*90	15	23	1260	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	80*100	18	26	1404	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	90*110	21	28	1548	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	

Adopt 360° whole area luminescence technology, use high strength acrylic material.

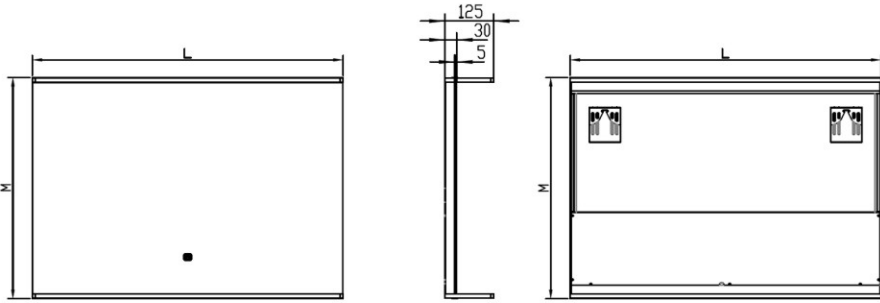





OPTIONAL FEATURES



- **CUSTOMIZED**
- **HAND SWEEP**
- **MUSIC**
- **DEFOGGING**
- **CCT CHANGE**
- **TEMPERATURE DISPLAY**
- **BLUETOOTH**
- **TIME DISPLAY**
- **CALL**

Basis function	Size(CM)	Weight(KG)	Power(W)	Lumen(lm)	Input Voltage(V)	CRI	IP	LED Life Span	Warranty	Certification
Touch Switch Dimming	直径60	6	22	1205	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	直径70	7	26	1440	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	直径80	9	30	1626	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	直径90	11	35	1889	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	直径100	14	38	2104	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	

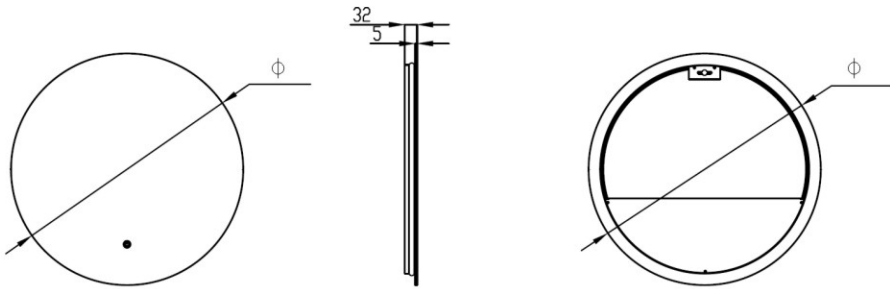
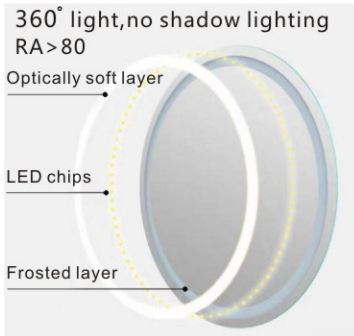




OPTIONAL FEATURES

- CUSTOMIZED
- HAND SWEEP
- MUSIC
- DEFOGGING
- CCT CHANGE
- 31°C TEMPERATURE DISPLAY
- BLUETOOTH
- TIME DISPLAY
- CALL

Basis function	Size(CM)	Weight(KG)	Power(W)	Lumen(lm)	Input Voltage(V)	CRI	IP	LED Life Span	Warranty	Certification
Touch Switch Dimming	直径60	6	22	1205	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	直径70	7	26	1440	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	直径80	9	30	1626	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	直径90	11	35	1889	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	直径100	14	38	2104	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	

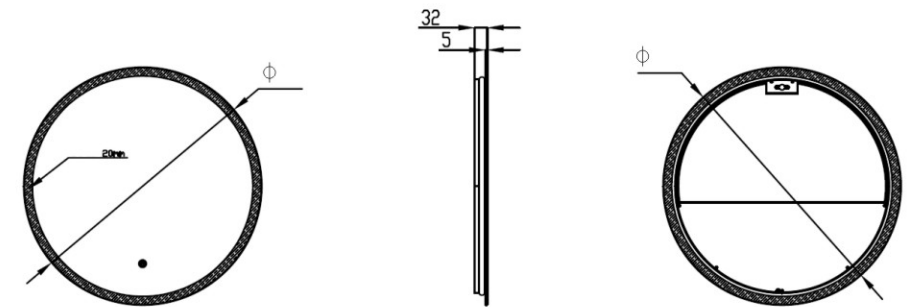
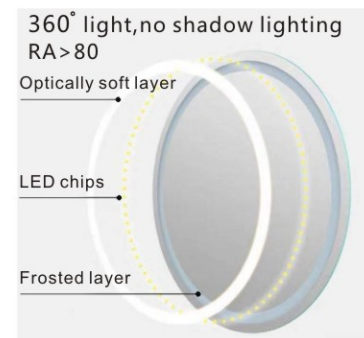




OPTIONAL FEATURES

- CUSTOMIZED
- HAND SWEEP
- MUSIC
- DEFOGGING
- CCT CHANGE
- 31°C TEMPERATURE DISPLAY
- BLUETOOTH
- TIME DISPLAY
- CALL

Basis function	Size(CM)	Weight(KG)	Power(W)	Lumen(lm)	Input Voltage(V)	CRI	IP	LED Life Span	Warranty	Certification
Touch Switch Dimming	直径60	6	20	1096	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	直径70	7	24	1329	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	直径80	9	28	1545	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	直径90	11	33	1781	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	直径100	13	36	1993	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	

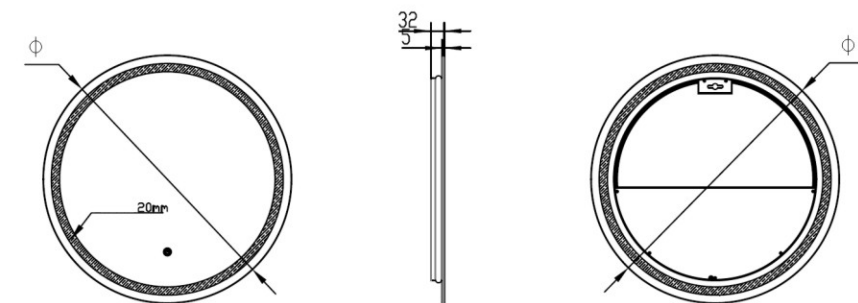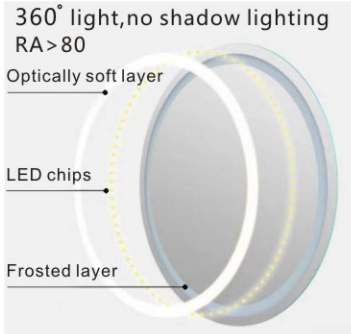



OPTIONAL FEATURES

CUSTOMIZED

HAND SWEEP

MUSIC

DEFOGGING

CCT CHANGE


TEMPERATURE DISPLAY


BLUETOOTH

TIME DISPLAY

CALL

Basis function	Size(CM)	Weight(KG)	Power(W)	Lumen(lm)	Input Voltage(V)	CRI	IP	LED Life Span	Warranty	Certification
Touch Switch Dimming	直径60	5	25	1292	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	直径70	6	29	1511	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	直径80	7	34	1734	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	直径90	8	38	1943	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	直径100	9	42	2158	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	

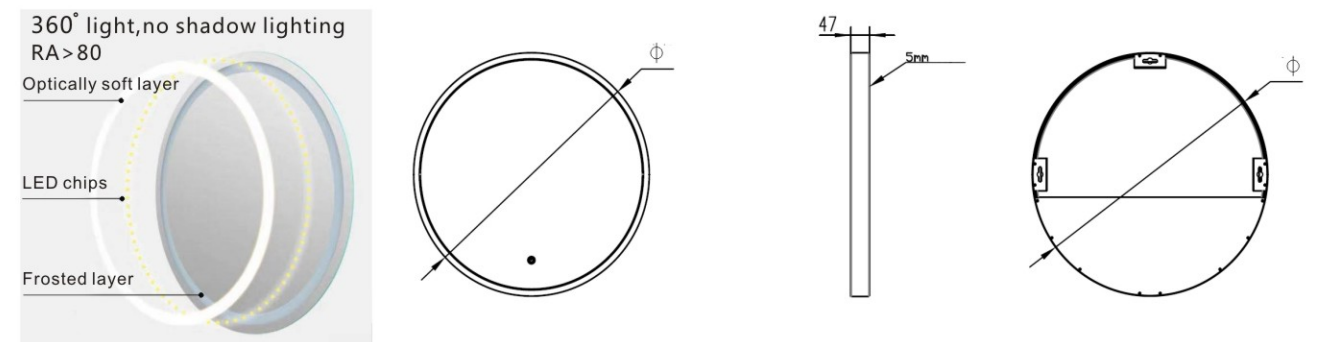

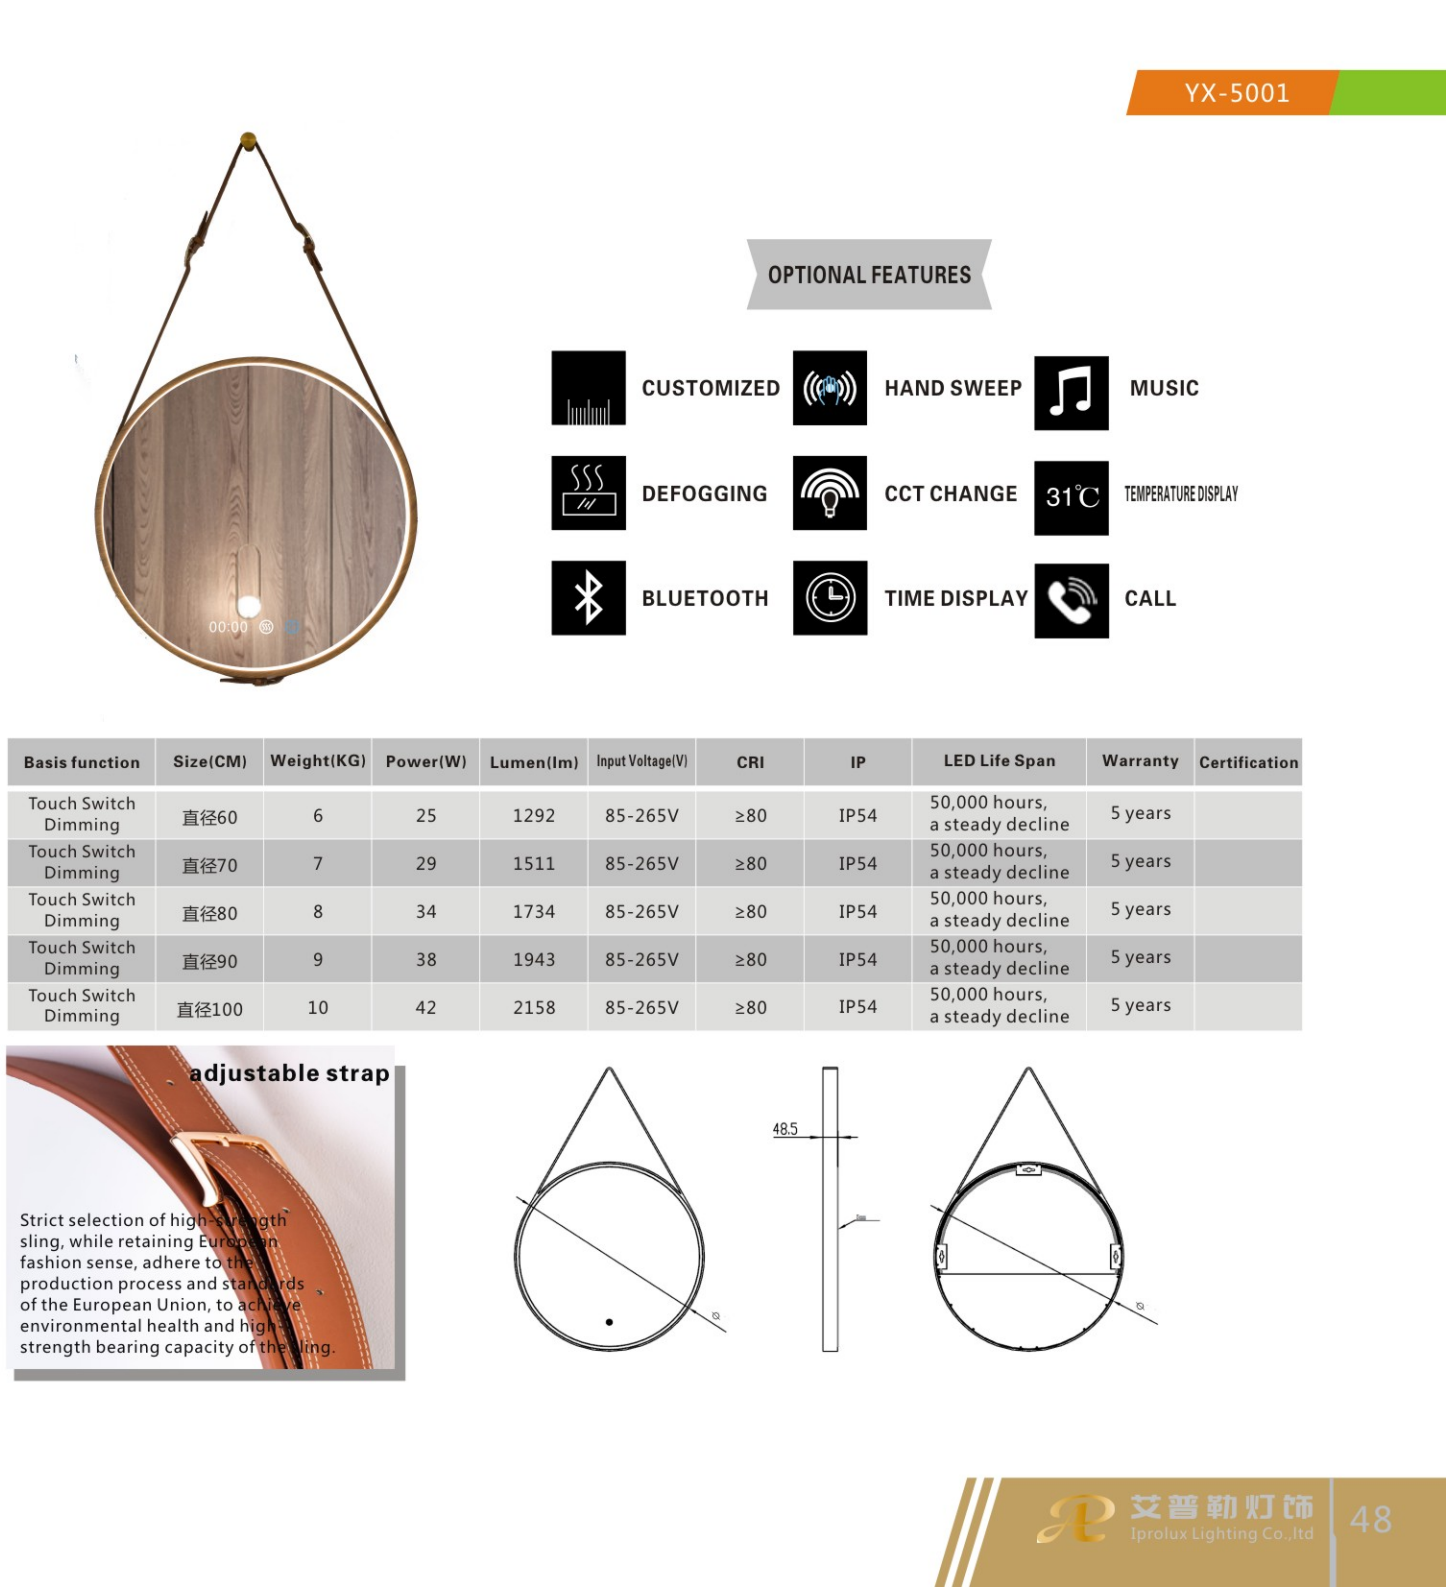



OPTIONAL FEATURES



CUSTOMIZED



HAND SWEEP



MUSIC



DEFOGGING



CCT CHANGE



31°C TEMPERATURE DISPLAY



BLUETOOTH



TIME DISPLAY



CALL


Basis function	Size(CM)	Weight(KG)	Power(W)	Lumen(lm)	Input Voltage(V)	CRI	IP	LED Life Span	Warranty	Certification
Touch Switch Dimming	50*80	7	28	1522	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	60*90	9	31	1675	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	

Dedicated LED Strip

Energy saving Waterproof Long life




European Union standard LED aluminum base wick, lamp bead layout is uniform and reasonable, good light transmission. Aluminum-based wick has good optical reflection effect, long life can effectively reduce light aging loss, improve light efficiency.

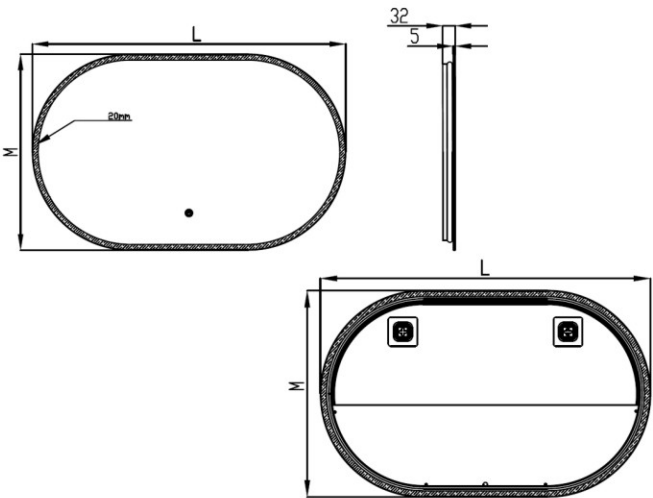




OPTIONAL FEATURES

- CUSTOMIZED
- DEFOGGING
- BLUETOOTH
- HAND SWEEP
- CCT CHANGE
- TIME DISPLAY
- MUSIC
- 31°C TEMPERATURE DISPLAY
- CALL

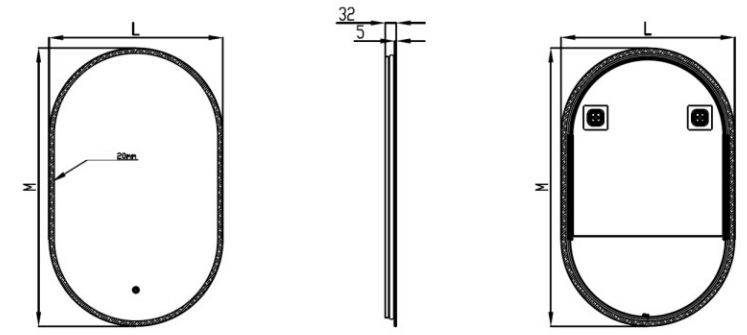

Basis function	Size(CM)	Weight(KG)	Power(W)	Lumen(lm)	Input Voltage(V)	CRI	IP	LED Life Span	Warranty	Certification
Touch Switch Dimming	50*80	6	28	1522	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	60*90	8	31	1675	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	

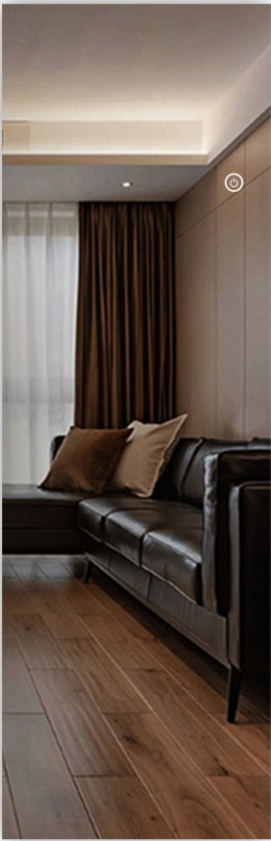

OPTIONAL FEATURES



CUSTOMIZED



HAND SWEEP



MUSIC



DEFOGGING



CCT CHANGE



TEMPERATURE DISPLAY



BLUETOOTH



TIME DISPLAY





CALL


Dedicated LED Strip
Energy saving Waterproof Long life



European Union standard LED aluminum base wick, lamp bead layout is uniform and reasonable, good light transmission. Aluminum-based wick has good optical reflection effect, long life can effectively reduce light aging loss, improve light efficiency.

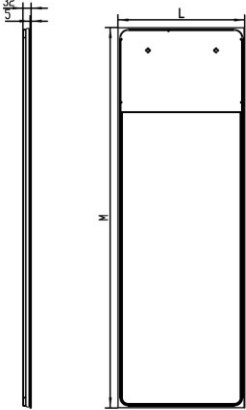

Basis function	Size(CM)	Weight(KG)	Power(W)	Lumen(lm)	Input Voltage(V)	CRI	IP	LED Life Span	Warranty	Certification
Touch Switch Dimming	150*50	10	41	2224	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	150*50	12	43	2335	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	

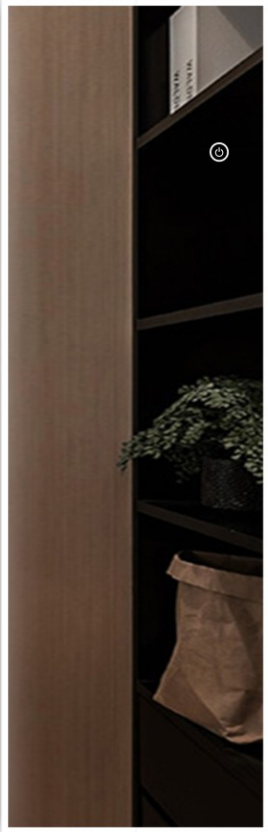

OPTIONAL FEATURES



CUSTOMIZED



HAND SWEEP



MUSIC



DEFOGGING



CCT CHANGE



31°C TEMPERATURE DISPLAY



BLUETOOTH



TIME DISPLAY




CALL

Dedicated LED Strip

Energy saving Waterproof Long life



European Union standard LED aluminum base wick, lamp bead layout is uniform and reasonable, good light transmission. Aluminum-based wick has good optical reflection effect, long life can effectively reduce light aging loss, improve light efficiency.

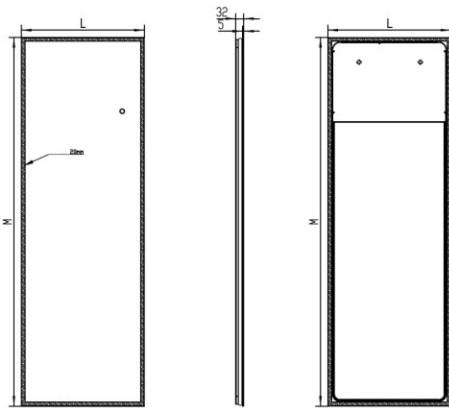

Basis function	Size(CM)	Weight(KG)	Power(W)	Lumen(lm)	Input Voltage(V)	CRI	IP	LED Life Span	Warranty	Certification
Touch Switch Dimming	150*50	10	41	2224	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	150*50	12	43	2335	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	



Dressing Mirror



OPTIONAL FEATURES



CUSTOMIZED



HAND SWEEP



MUSIC



DEFOGGING



CCT CHANGE



31°C TEMPERATURE DISPLAY



BLUETOOTH



TIME DISPLAY





CALL

Dedicated LED Strip

Energy saving Waterproof Long life



European Union standard LED aluminum base wick, lamp bead layout is uniform and reasonable, good light transmission. Aluminum-based wick has good optical reflection effect, long life can effectively reduce light aging loss, improve light efficiency.



Basis function	Size(CM)	Weight(KG)	Power(W)	Lumen(lm)	Input Voltage(V)	CRI	IP	LED Life Span	Warranty	Certification
Touch Switch Dimming	150*50	10	39	2160	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	150*50	12	42	2281	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	



Dressing Mirror

CY-2203

OPTIONAL FEATURES



CUSTOMIZED



HAND SWEEP



MUSIC



DEFOGGING



CCT CHANGE



TEMPERATURE DISPLAY



BLUETOOTH



TIME DISPLAY




CALL

Dedicated LED Strip


Energy saving Waterproof Long life



European Union standard LED aluminum base wick, lamp bead layout is uniform and reasonable, good light transmission. Aluminum-based wick has good optical reflection effect, long life can effectively reduce light aging loss, improve light efficiency.

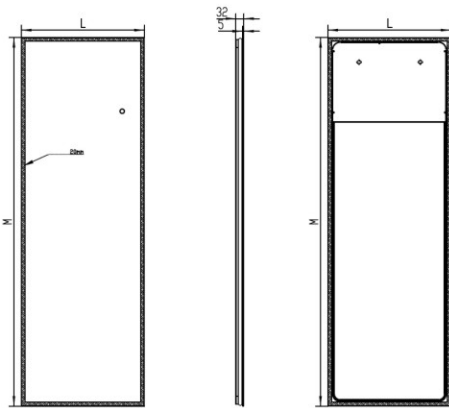

Basis function	Size(CM)	Weight(KG)	Power(W)	Lumen(lm)	Input Voltage(V)	CRI	IP	LED Life Span	Warranty	Certification
Touch Switch Dimming	150*50	11	36	1709	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	150*50	12	36	1709	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	

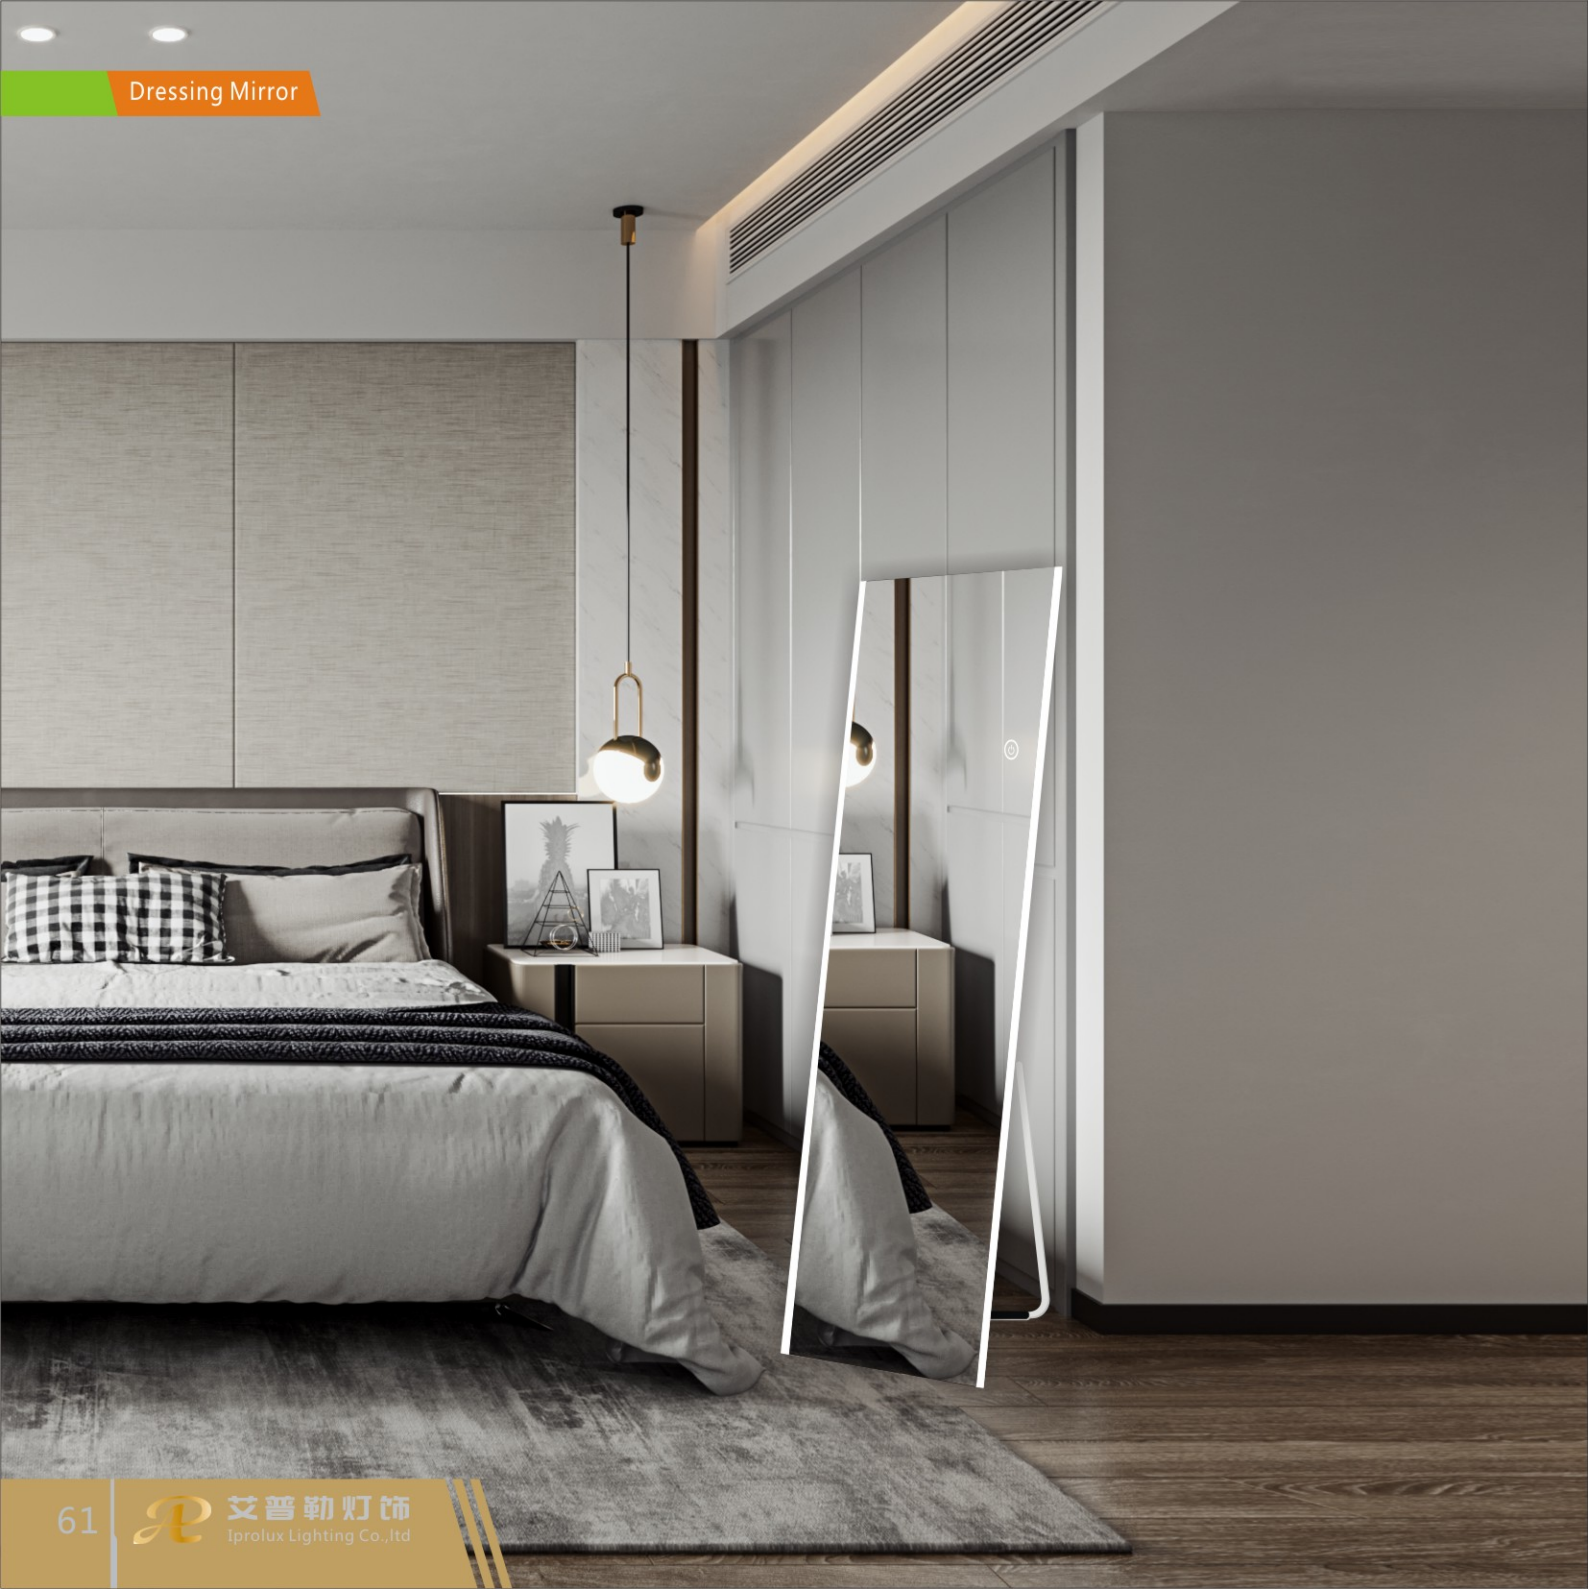

OPTIONAL FEATURES



CUSTOMIZED



HAND SWEEP



MUSIC



DEFOGGING



CCT CHANGE



31°C TEMPERATURE DISPLAY



BLUETOOTH



TIME DISPLAY




CALL

Dedicated LED Strip

Energy saving Waterproof Long life



European Union standard LED aluminum base wick, lamp bead layout is uniform and reasonable, good light transmission. Aluminum-based wick has good optical reflection effect, long life can effectively reduce light aging loss, improve light efficiency.



Basis function	Size(CM)	Weight(KG)	Power(W)	Lumen(lm)	Input Voltage(V)	CRI	IP	LED Life Span	Warranty	Certification
Touch Switch Dimming	150*50	12	36	1709	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	150*50	13	36	1709	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	



OPTIONAL FEATURES



CUSTOMIZED



HAND SWEEP



MUSIC



DEFOGGING



CCT CHANGE



31°C TEMPERATURE DISPLAY



BLUETOOTH




TIME DISPLAY



CALL

Dedicated LED Strip
Energy saving Waterproof Long life

European Union standard LED aluminum base wick, lamp bead layout is uniform and reasonable, good light transmission. Aluminum-based wick has good optical reflection effect, long life can effectively reduce light aging loss, improve light efficiency.

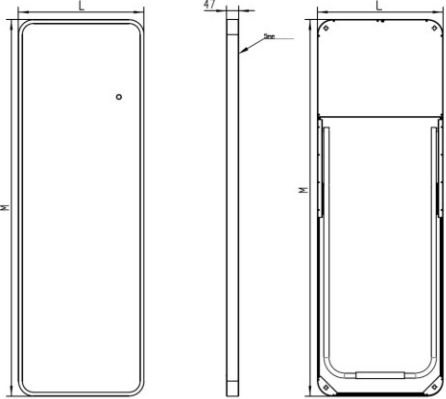

Basis function	Size(CM)	Weight(KG)	Power(W)	Lumen(lm)	Input Voltage(V)	CRI	IP	LED Life Span	Warranty	Certification
Touch Switch Dimming	150*50	13	47	2542	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	150*50	15	50	2584	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	



Dressing Mirror

CY-6203




OPTIONAL FEATURES

-  CUSTOMIZED
-  HAND SWEEP
-  MUSIC
-  DEFOGGING
-  CCT CHANGE
-  31°C TEMPERATURE DISPLAY
-  BLUETOOTH
-  TIME DISPLAY
-  CALL

Dedicated LED Strip
Energy saving Waterproof Long life



European Union standard LED aluminum base wick, lamp bead layout is uniform and reasonable, good light transmission. Aluminum-based wick has good optical reflection effect, long life can effectively reduce light aging loss, improve light efficiency.

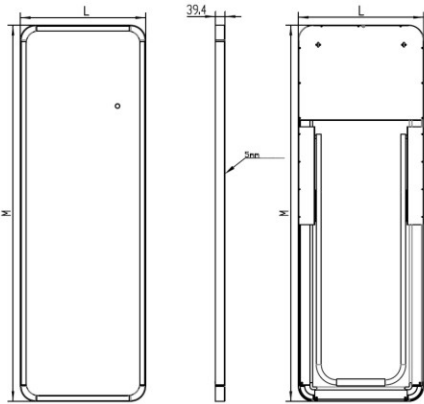

Basis function	Size(CM)	Weight(KG)	Power(W)	Lumen(lm)	Input Voltage(V)	CRI	IP	LED Life Span	Warranty	Certification
Touch Switch Dimming	150*50	13	45	2476	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	150*50	15	48	2620	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	




OPTIONAL FEATURES

-  CUSTOMIZED
-  HAND SWEEP
-  MUSIC
-  DEFOGGING
-  CCT CHANGE
-  31°C TEMPERATURE DISPLAY
-  BLUETOOTH
-  TIME DISPLAY
-  CALL


Dedicated LED Strip
Energy saving Waterproof Long life



European Union standard LED aluminum base wick, lamp bead layout is uniform and reasonable, good light transmission. Aluminum-based wick has good optical reflection effect, long life can effectively reduce light aging loss, improve light efficiency.

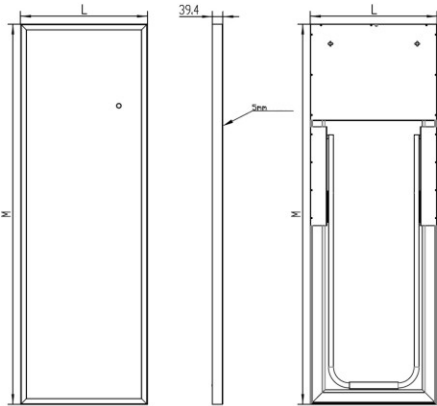

Basis function	Size(CM)	Weight(KG)	Power(W)	Lumen(lm)	Input Voltage(V)	CRI	IP	LED Life Span	Warranty	Certification
Touch Switch Dimming	150*50	13	45	2476	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	150*50	15	48	2620	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	

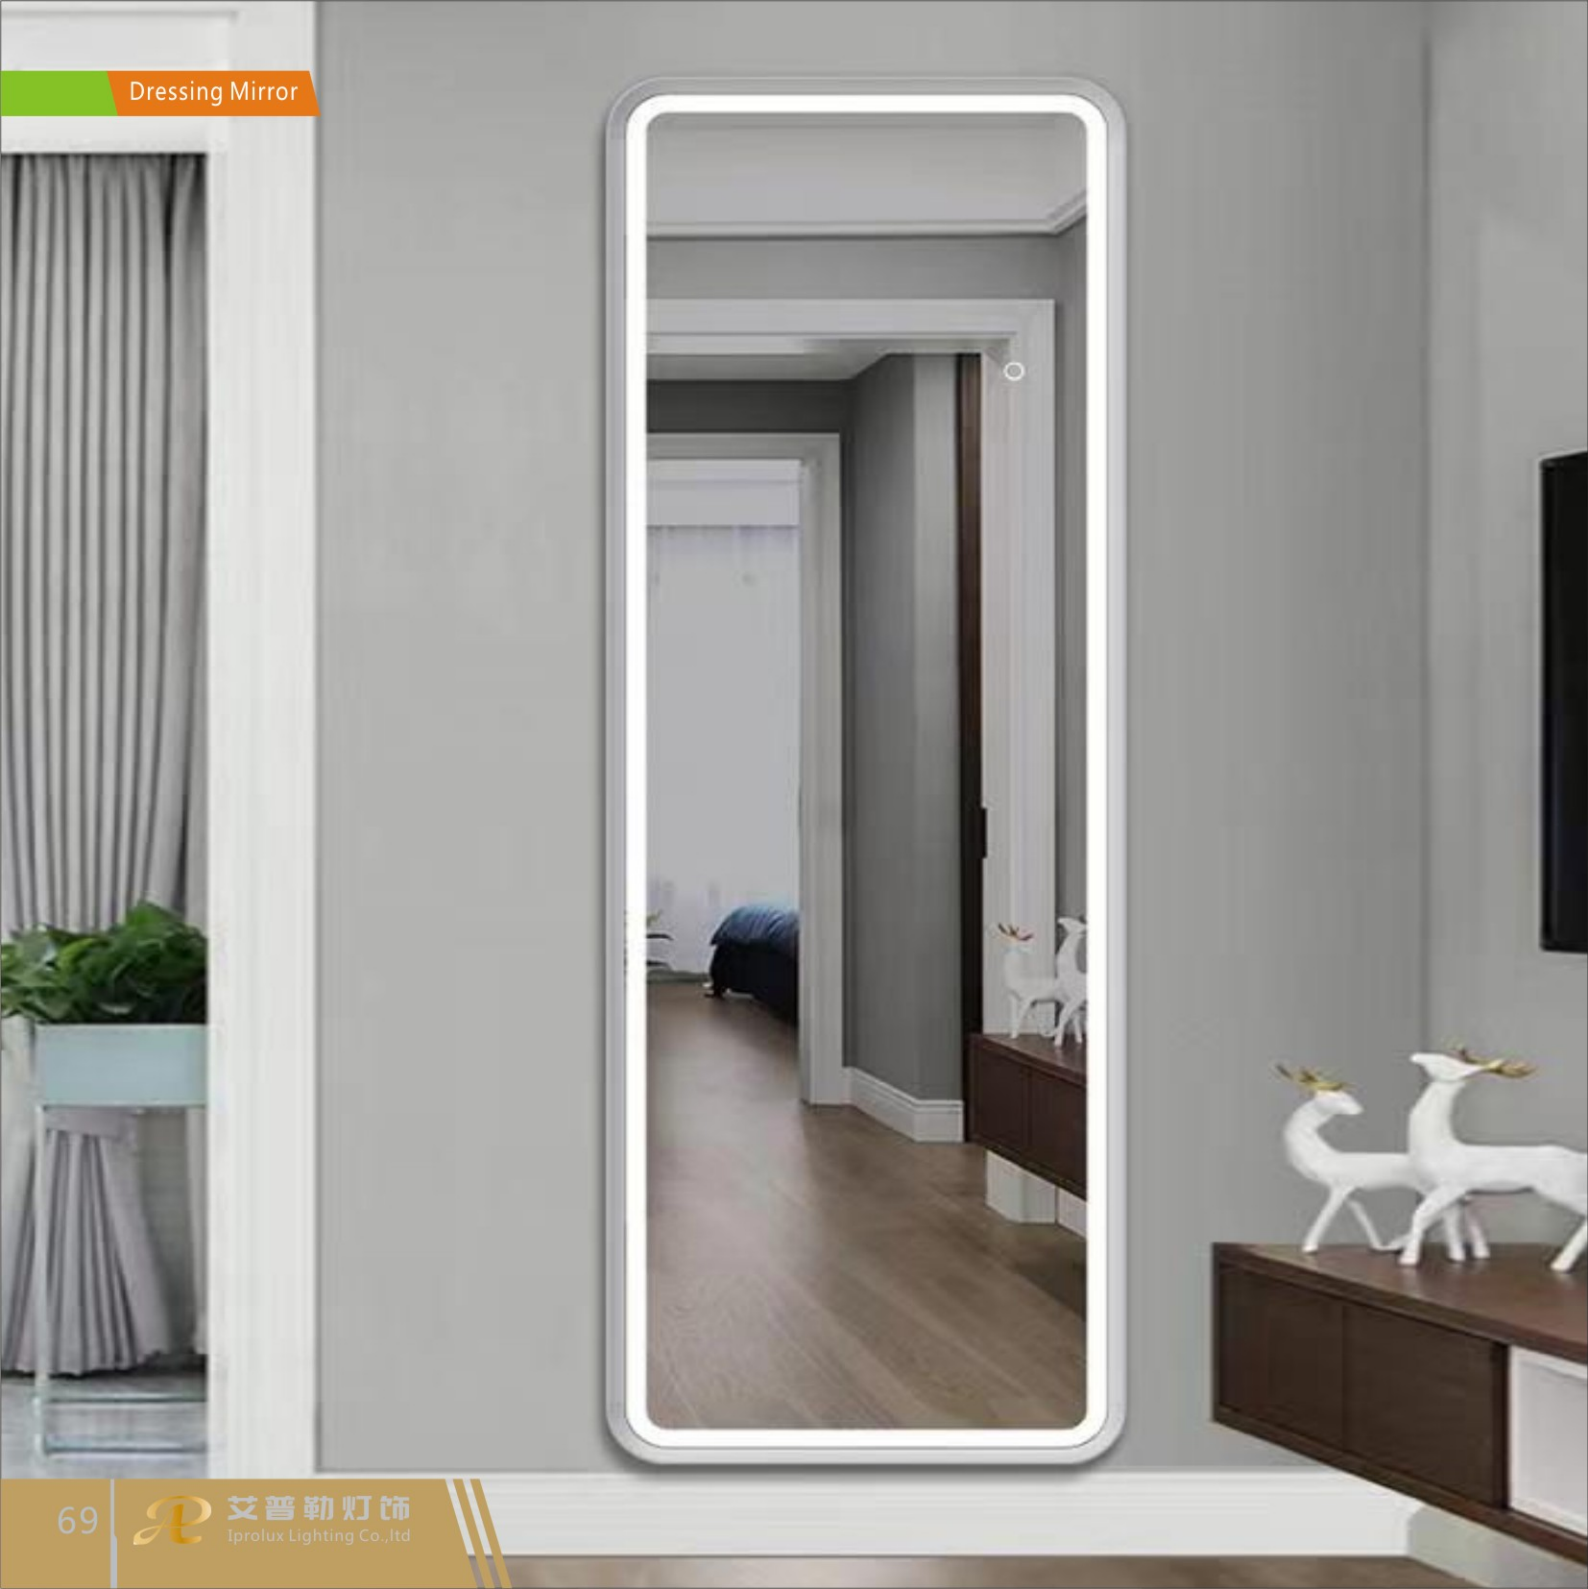

Dressing Mirror

CY-6205

OPTIONAL FEATURES



CUSTOMIZED



HAND SWEEP



MUSIC



DEFOGGING



CCT CHANGE



31°C TEMPERATURE DISPLAY



BLUETOOTH



TIME DISPLAY




CALL

Dedicated LED Strip

Energy saving Waterproof Long life



European Union standard LED aluminum base wick, lamp bead layout is uniform and reasonable, good light transmission. Aluminum-based wick has good optical reflection effect, long life can effectively reduce light aging loss, improve light efficiency.

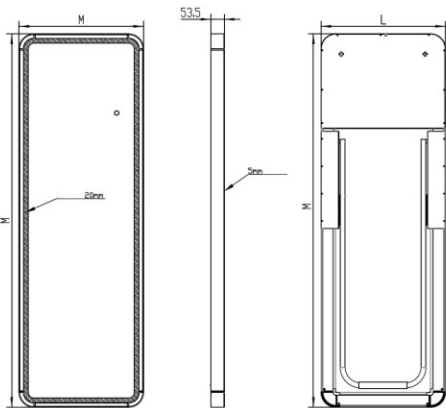

Basis function	Size(CM)	Weight(KG)	Power(W)	Lumen(lm)	Input Voltage(V)	CRI	IP	LED Life Span	Warranty	Certification
Touch Switch Dimming	150*50	14	45	2377	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	150*50	16	47	2516	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	



Dressing Mirror

CY-6206




OPTIONAL FEATURES

- CUSTOMIZED
- HAND SWEEP
- MUSIC
- DEFOGGING
- CCT CHANGE
- 31°C TEMPERATURE DISPLAY
- BLUETOOTH
- TIME DISPLAY
- CALL

Dedicated LED Strip
Energy saving Waterproof Long life

European Union standard LED aluminum base wick, lamp bead layout is uniform and reasonable, good light transmission. Aluminum-based wick has good optical reflection effect, long life can effectively reduce light aging loss, improve light efficiency.

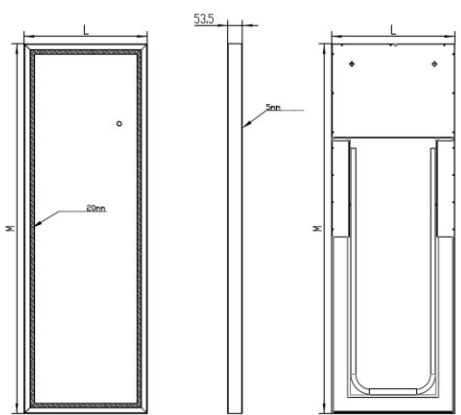

Basis function	Size(CM)	Weight(KG)	Power(W)	Lumen(lm)	Input Voltage(V)	CRI	IP	LED Life Span	Warranty	Certification
Touch Switch Dimming	150*50	14	45	2377	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	150*50	16	47	2516	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	