



艾普勒灯饰

Iprolux Lighting Co.,Ltd

NINGBO IPROLUX LIGHTING CO.,LTD

+86 13082949888

+86 (574) 88327796

Email:info@iprolux.net

Adress:No.77,Yunmo Road,Yunlong Town,Yinzhou District,Ningbo City,China.


www.iprolux.net



艾普勒灯饰

Iprolux Lighting Co.,Ltd

LED MIROR

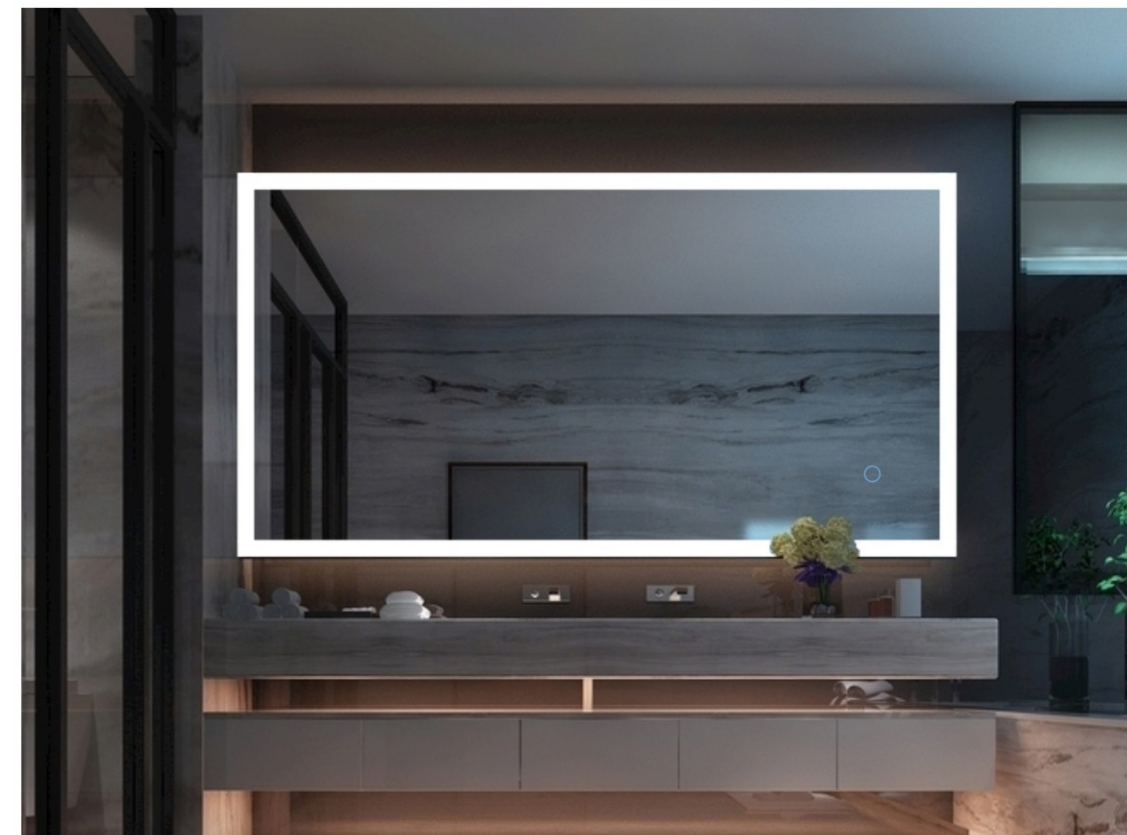

2021



NATURAL LIGHT

It will allow you to complete your beauty routine perfectly, regardless of the time of day.




WARM LIGHT

Turn on the warm lights at night, the light is soft without glare, which is helpful for sleeping.

Color Temperature

5500K



3000K


Ningbo Iprolux Lighting Co., Ltd, an innovative company, established in 2016 and specialized in the design and manufacture of bathroom smart mirror, dressing mirror and LED intelligent lighting. We have professional light source, structure and industrial designers team. This team have advanced product design concepts, and their continuous efforts, continuous improvement, the pursuit of perfection, continuous innovation, the pursuit of excellence enable customer to enjoy the high quality of life brought by intelligent lighting.

We adhere to the principle of "innovation for development, quality for survival". Our products have passed FCC, TUV certification, and in line with CE, VDE, ROHS, ERP standard. Our products are popular in domestic, European and American markets. Adhering to the advantages of original design, R&D and manufacturing, we are committed to improving brand building, service and market operation capabilities.

CONTENT



Round angle mirror
P01~P14



Square angle mirror
P15~P38



Round mirror
P39~P52



Dressing mirror
P53~P72

Defogging



Before defogging After defogging

LED makeup mirror
Copper-free rustproof silver mirror

Color temperature



white light




warm light



natural light




OPTIONAL FEATURES

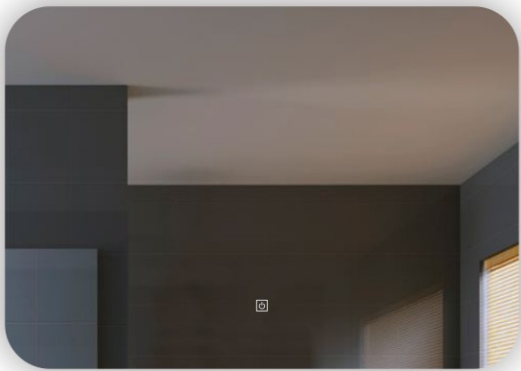

-  CUSTOMIZED
-  HAND SWEEP
-  MUSIC
-  DEFOGGING
-  CCT CHANGE
-  31°C TEMPERATURE DISPLAY
-  BLUETOOTH
-  TIME DISPLAY
-  CALL

Basis function	Size(in)	Weight(lb)	Power(W)	Lumen(lm)	Input Voltage(V)	CRI	IP	LED Life Span	Warranty	Certification
Touch Switch Dimming	20*28	15	30	1639	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	24*32	19	36	1927	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	28*36	24	41	2215	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	32*40	29	46	2503	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	36*44	34	51	2791	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	

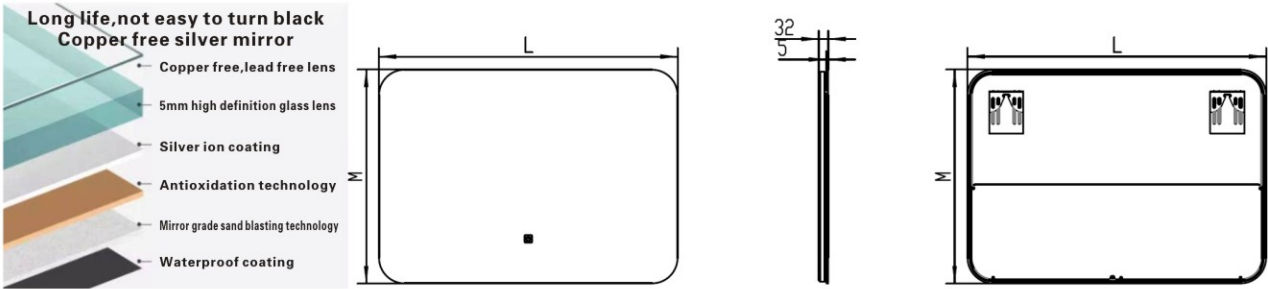




OPTIONAL FEATURES

- CUSTOMIZED
- HAND SWEEP
- MUSIC
- DEFOGGING
- CCT CHANGE
- 31°C TEMPERATURE DISPLAY
- BLUETOOTH
- TIME DISPLAY
- CALL

Basis function	Size(in)	Weight(lb)	Power(W)	Lumen(lm)	Input Voltage(V)	CRI	IP	LED Life Span	Warranty	Certification
Touch Switch Dimming	20*28	14	31	1710	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	24*32	19	36	1998	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	28*36	24	42	2286	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	32*40	28	47	2574	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	36*44	34	52	2862	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	

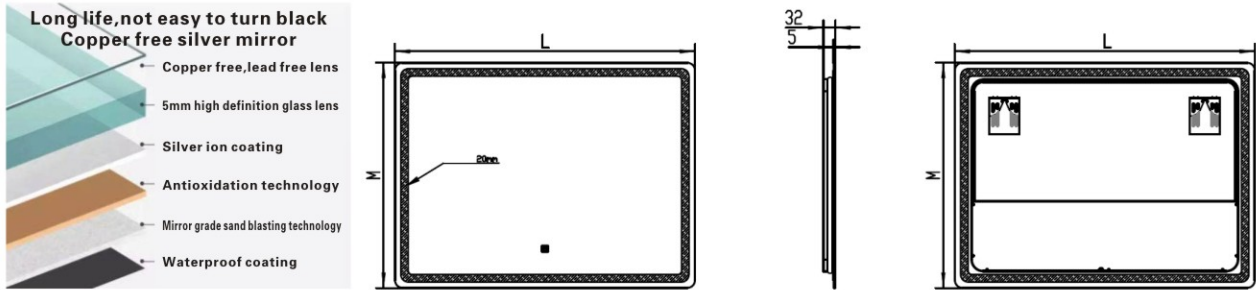






OPTIONAL FEATURES

- **CUSTOMIZED**
- **HAND SWEEP**
- **MUSIC**
- **DEFOGGING**
- **CCT CHANGE**
- **31°C** TEMPERATURE DISPLAY
- **BLUETOOTH**
- **TIME DISPLAY**
- **CALL**

Basis function	Size(in)	Weight(lb)	Power(W)	Lumen(lm)	Input Voltage(V)	CRI	IP	LED Life Span	Warranty	Certification
Touch Switch Dimming	20*28	14	28	1504	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	24*32	18	33	1792	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	28*36	23	38	2080	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	32*40	28	43	2368	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	36*44	33	48	2656	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	

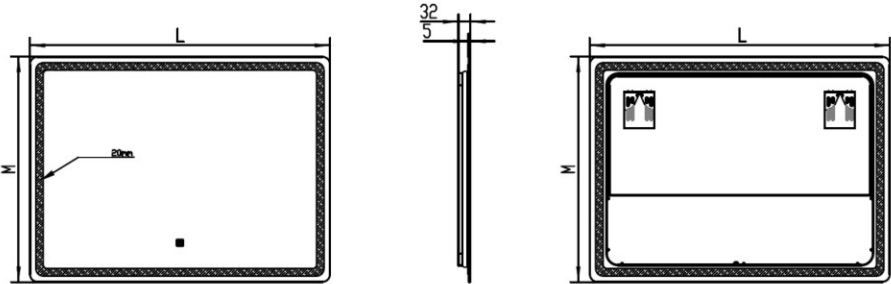

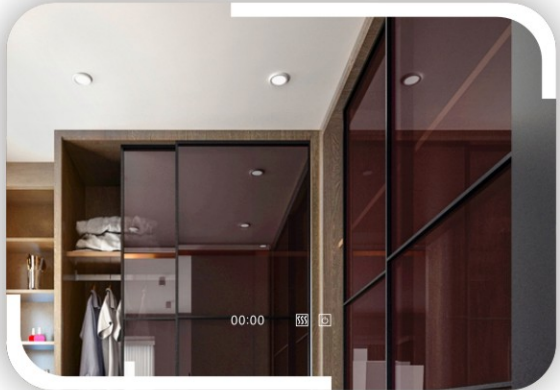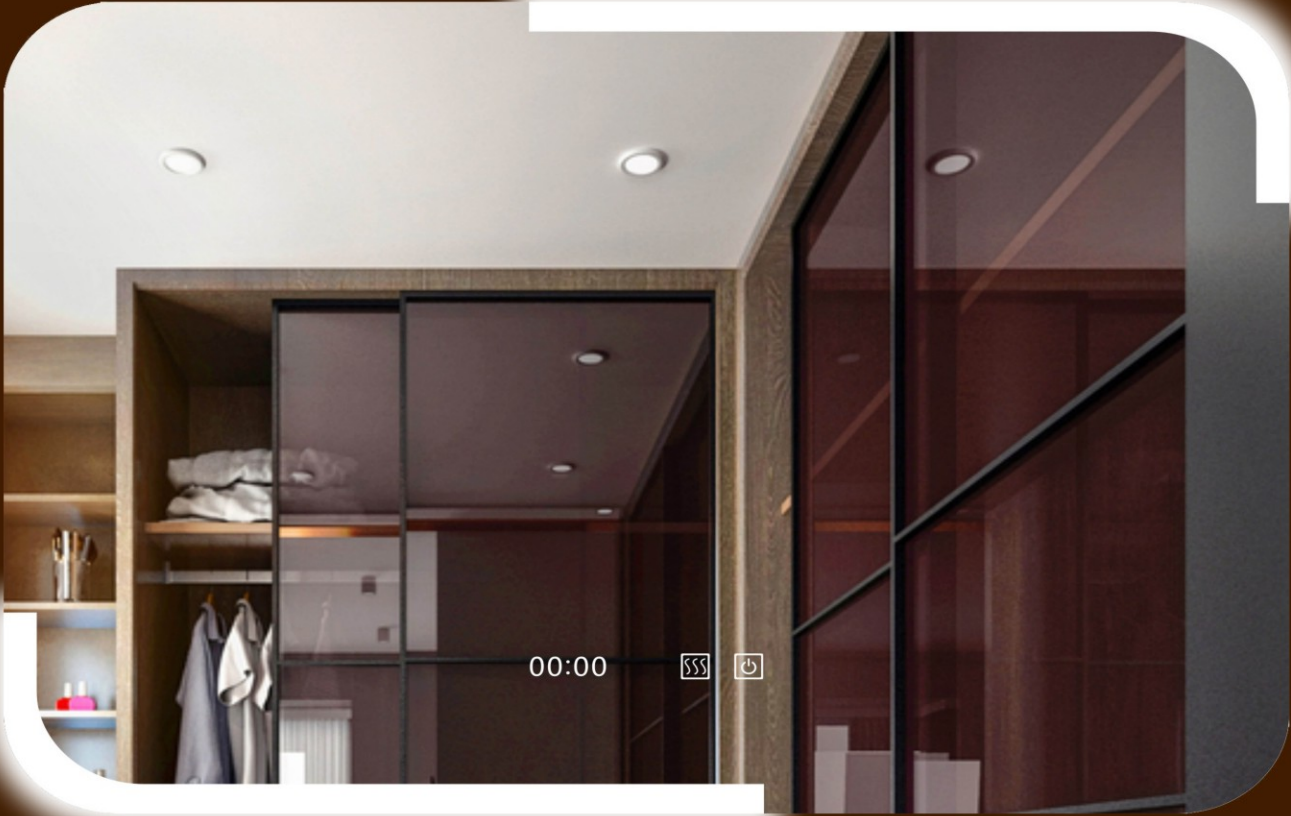

OPTIONAL FEATURES



CUSTOMIZED



HAND SWEEP



MUSIC



DEFOGGING



CCT CHANGE



TEMPERATURE DISPLAY



BLUETOOTH







TIME DISPLAY



CALL

Basis function	Size(in)	Weight(lb)	Power(W)	Lumen(lm)	Input Voltage(V)	CRI	IP	LED Life Span	Warranty	Certification
Touch Switch Dimming	20*28	16	13	800	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	24*32	21	13	800	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	28*36	26	13	800	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	32*40	31	13	800	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	36*44	37	13	800	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	



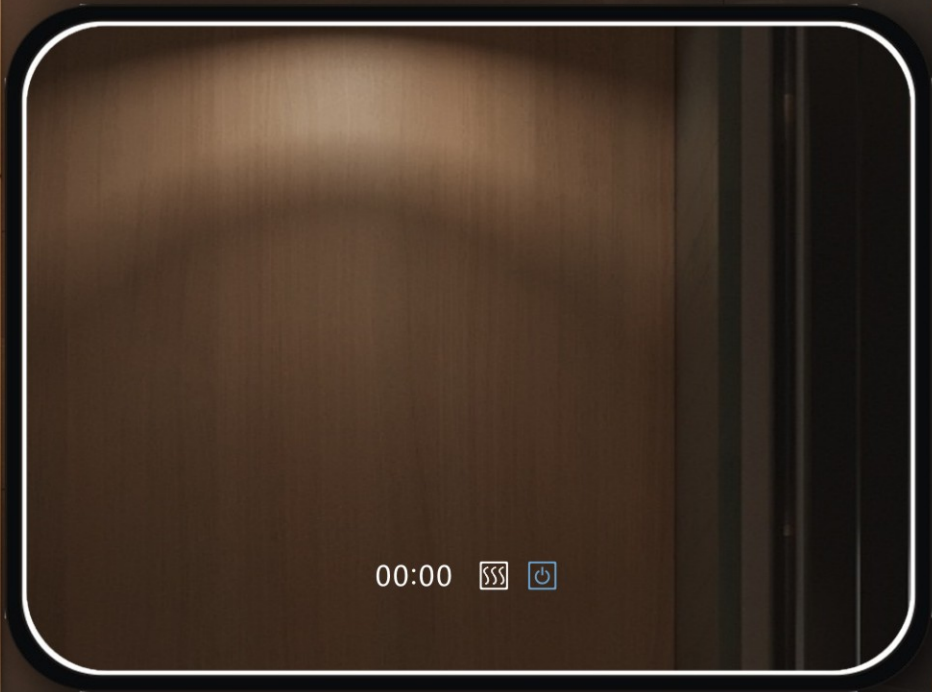

00:00



OPTIONAL FEATURES



CUSTOMIZED



HAND SWEEP



MUSIC



DEFOGGING



CCT CHANGE



TEMPERATURE DISPLAY



BLUETOOTH



TIME DISPLAY




CALL

Basis function	Size(in)	Weight(lb)	Power(W)	Lumen(lm)	Input Voltage(V)	CRI	IP	LED Life Span	Warranty	Certification
Touch Switch Dimming	20*28	15	30	1564	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	24*32	20	36	1836	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	28*36	25	41	2108	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	32*40	31	46	2380	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	36*44	37	51	2652	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	

Long life,not easy to turn black
Copper free silver mirror

- Copper free,lead free lens
- 5mm high definition glass lens
- Silver ion coating
- Antioxidation technology
- Mirror grade sand blasting technology
- Waterproof coating

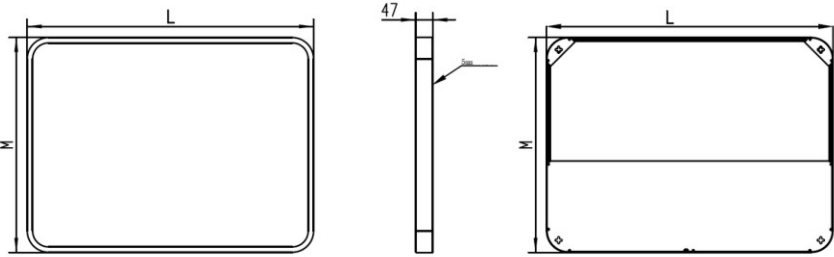




OPTIONAL FEATURES


-  CUSTOMIZED
-  HAND SWEEP
-  MUSIC
-  DEFOGGING
-  CCT CHANGE
-  31°C TEMPERATURE DISPLAY
-  BLUETOOTH
-  TIME DISPLAY
-  CALL

Basis function	Size(in)	Weight(lb)	Power(W)	Lumen(lm)	Input Voltage(V)	CRI	IP	LED Life Span	Warranty	Certification
Touch Switch Dimming	20*28	16	27	1467	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	24*32	20	32	1755	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	28*36	24	37	2043	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	32*40	29	43	2331	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	36*44	34	48	2619	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	

Long life,not easy to turn black
Copper free silver mirror

- Copper free,lead free lens
- 5mm high definition glass lens
- Silver ion coating
- Antioxidation technology
- Mirror grade sand blasting technology
- Waterproof coating


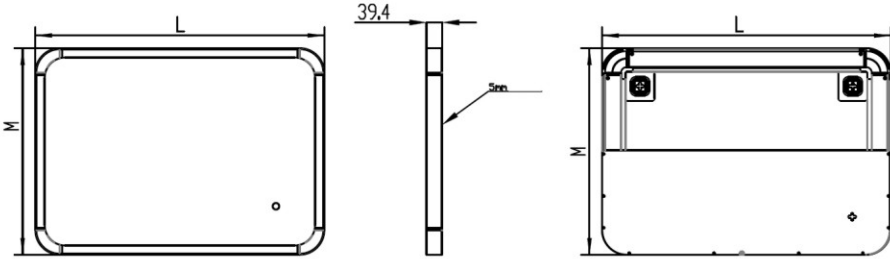


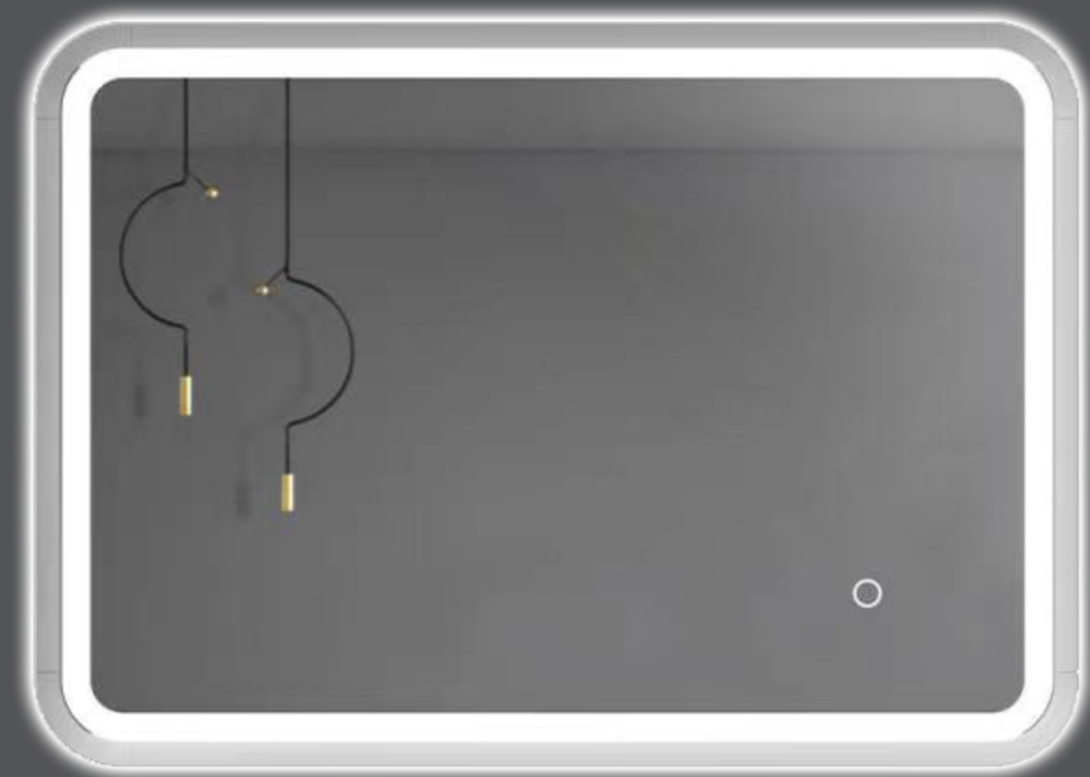

OPTIONAL FEATURES

- CUSTOMIZED
- HAND SWEEP
- MUSIC
- DEFOGGING
- CCT CHANGE
- 31°C TEMPERATURE DISPLAY
- BLUETOOTH
- TIME DISPLAY
- CALL

Basis function	Size(in)	Weight(lb)	Power(W)	Lumen(lm)	Input Voltage(V)	CRI	IP	LED Life Span	Warranty	Certification
Touch Switch Dimming	20*28	17	26	1392	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	24*32	21	32	1670	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	28*36	25	37	1948	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	32*40	30	42	2227	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	36*44	35	47	2505	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	

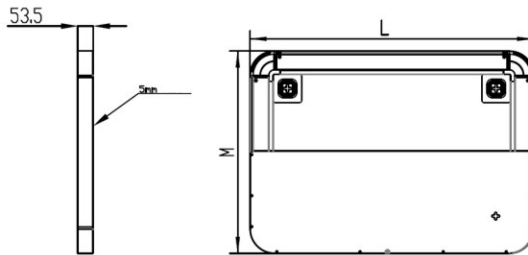



OPTIONAL FEATURES



CUSTOMIZED



HAND SWEEP



MUSIC



DEFOGGING



CCT CHANGE



TEMPERATURE DISPLAY



BLUETOOTH




TIME DISPLAY




CALL

Basis function	Size(in)	Weight(lb)	Power(W)	Lumen(lm)	Input Voltage(V)	CRI	IP	LED Life Span	Warranty	Certification
Touch Switch Dimming	20*28	15	28	1313	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	24*32	19	32	1511	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	28*36	24	37	1773	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	32*40	29	40	1904	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	36*44	35	43	2068	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	

Aluminum Frame
Strong and durable, anti rust,
anti deformation, anti oxidation

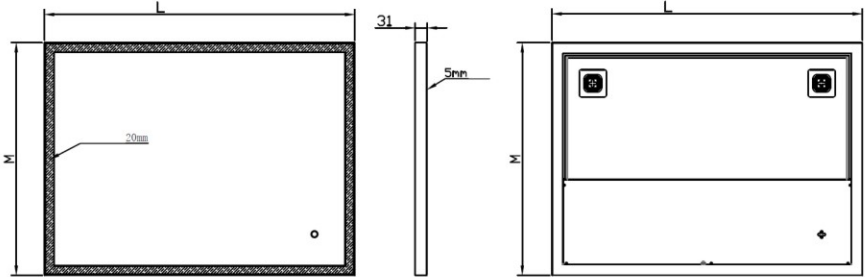


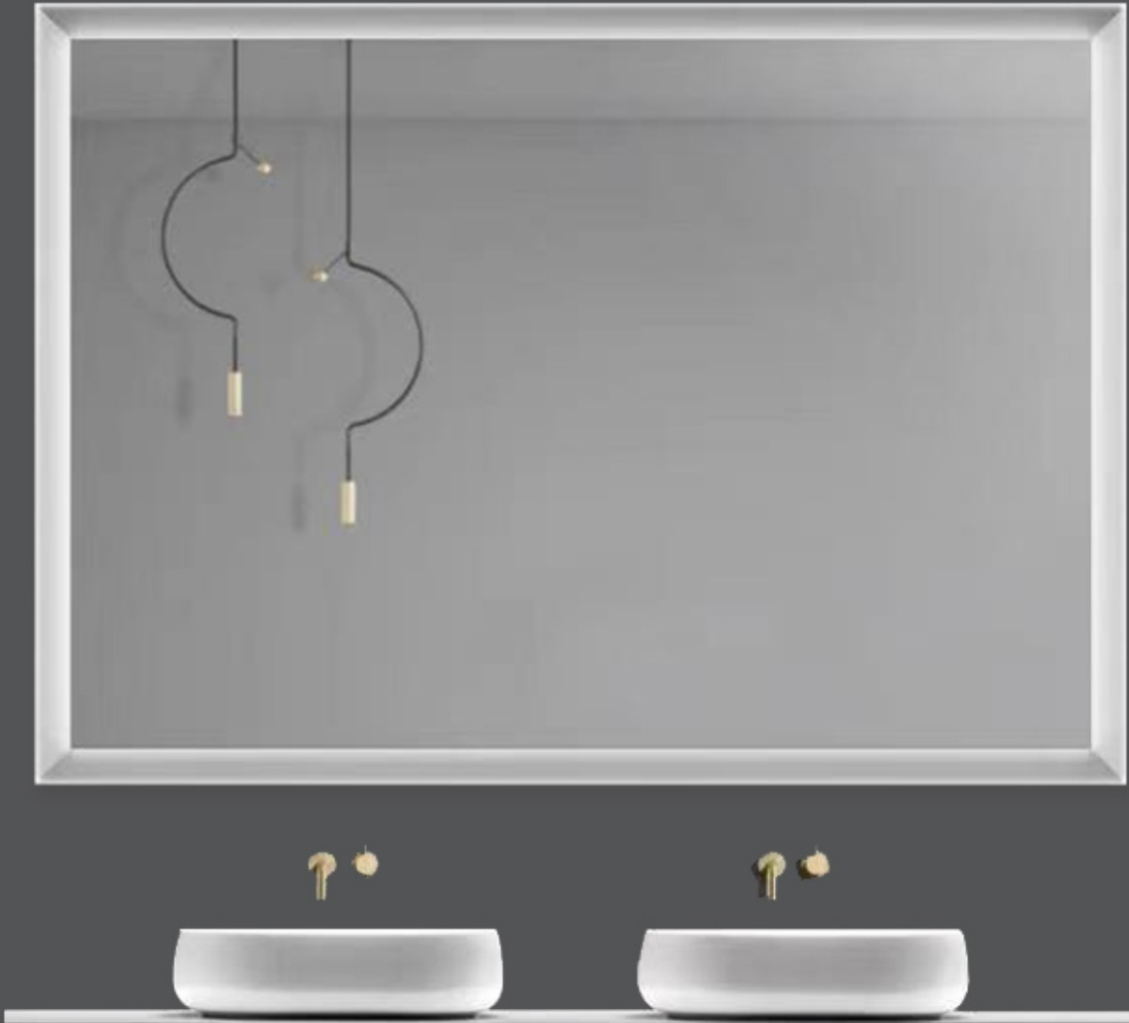


OPTIONAL FEATURES

- CUSTOMIZED
- DEFOGGING
- BLUETOOTH
- HAND SWEEP
- CCT CHANGE
- TIME DISPLAY
- MUSIC
- 31°C TEMPERATURE DISPLAY
- CALL

Basis function	Size(in)	Weight(lb)	Power(W)	Lumen(lm)	Input Voltage(V)	CRI	IP	LED Life Span	Warranty	Certification
Touch Switch Dimming	20*28	16	27	1467	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	24*32	20	32	1755	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	28*36	24	37	2043	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	32*40	29	43	2331	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	36*44	34	48	2619	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	

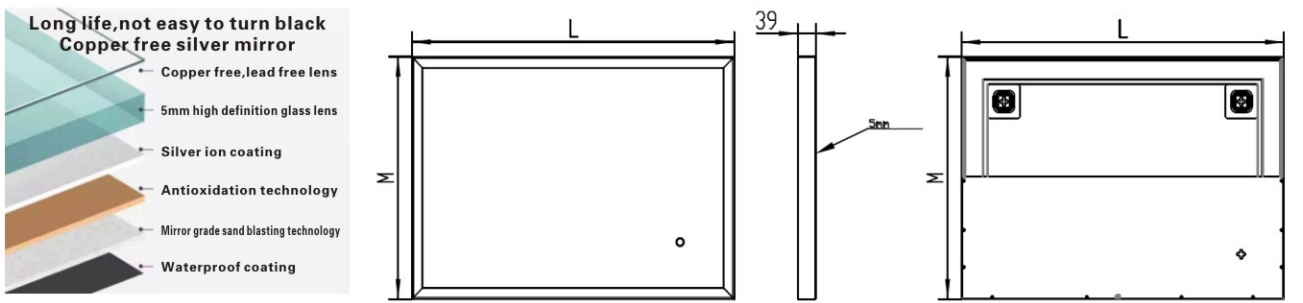

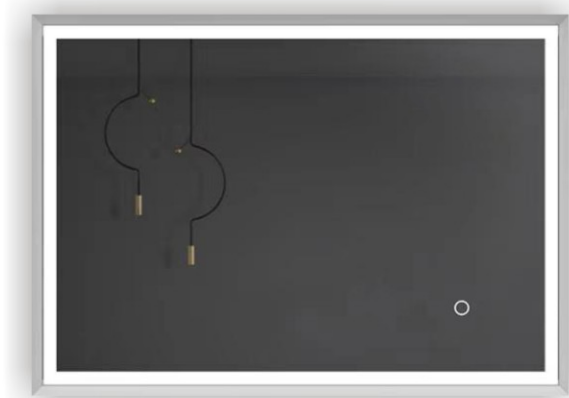


OPTIONAL FEATURES

- CUSTOMIZED
- HAND SWEEP
- MUSIC
- DEFOGGING
- CCT CHANGE
- 31°C TEMPERATURE DISPLAY
- BLUETOOTH
- TIME DISPLAY
- CALL

Basis function	Size(in)	Weight(lb)	Power(W)	Lumen(lm)	Input Voltage(V)	CRI	IP	LED Life Span	Warranty	Certification
Touch Switch Dimming	20*28	17	26	1392	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	24*32	21	32	1670	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	28*36	25	37	1948	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	32*40	30	42	2227	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	36*44	35	47	2505	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	


Long life,not easy to turn black
Copper free silver mirror

- Copper free,lead free lens
- 5mm high definition glass lens
- Silver ion coating
- Antioxidation technology
- Mirror grade sand blasting technology
- Waterproof coating

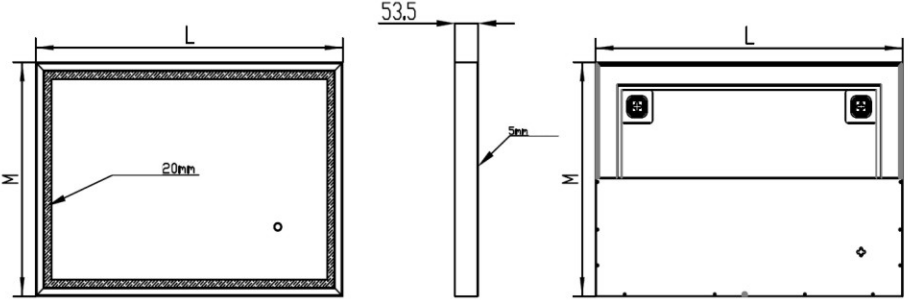



OPTIONAL FEATURES

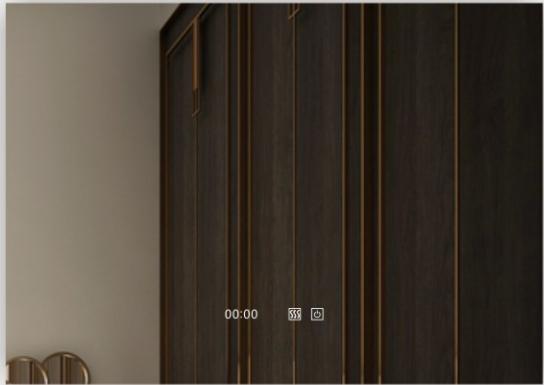




- CUSTOMIZED
- HAND SWEEP
- MUSIC
- DEFOGGING
- CCT CHANGE
- 31°C TEMPERATURE DISPLAY
- BLUETOOTH
- TIME DISPLAY
- CALL

Basis function	Size(in)	Weight(lb)	Power(W)	Lumen(lm)	Input Voltage(V)	CRI	IP	LED Life Span	Warranty	Certification
Touch Switch Dimming	20*28	15	15	709	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	24*32	19	19	824	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	28*36	24	21	939	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	32*40	29	23	1054	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	36*44	34	26	1170	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	

Long life,not easy to turn black
Copper free silver mirror

- Copper free,lead free lens
- 5mm high definition glass lens
- Silver ion coating
- Antioxidation technology
- Mirror grade sand blasting technology
- Waterproof coating

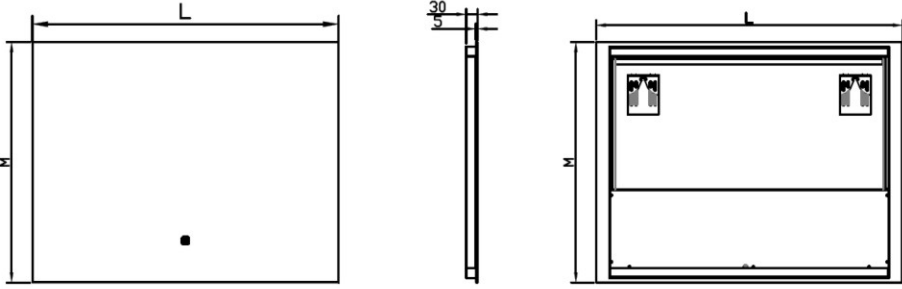

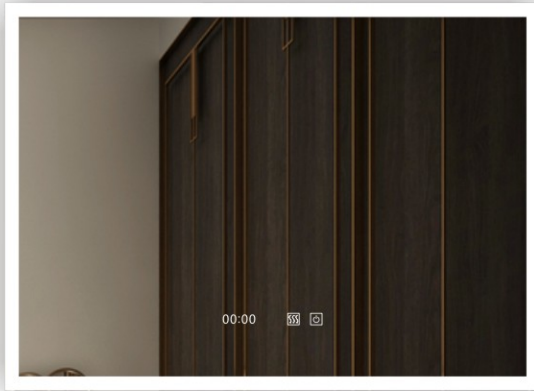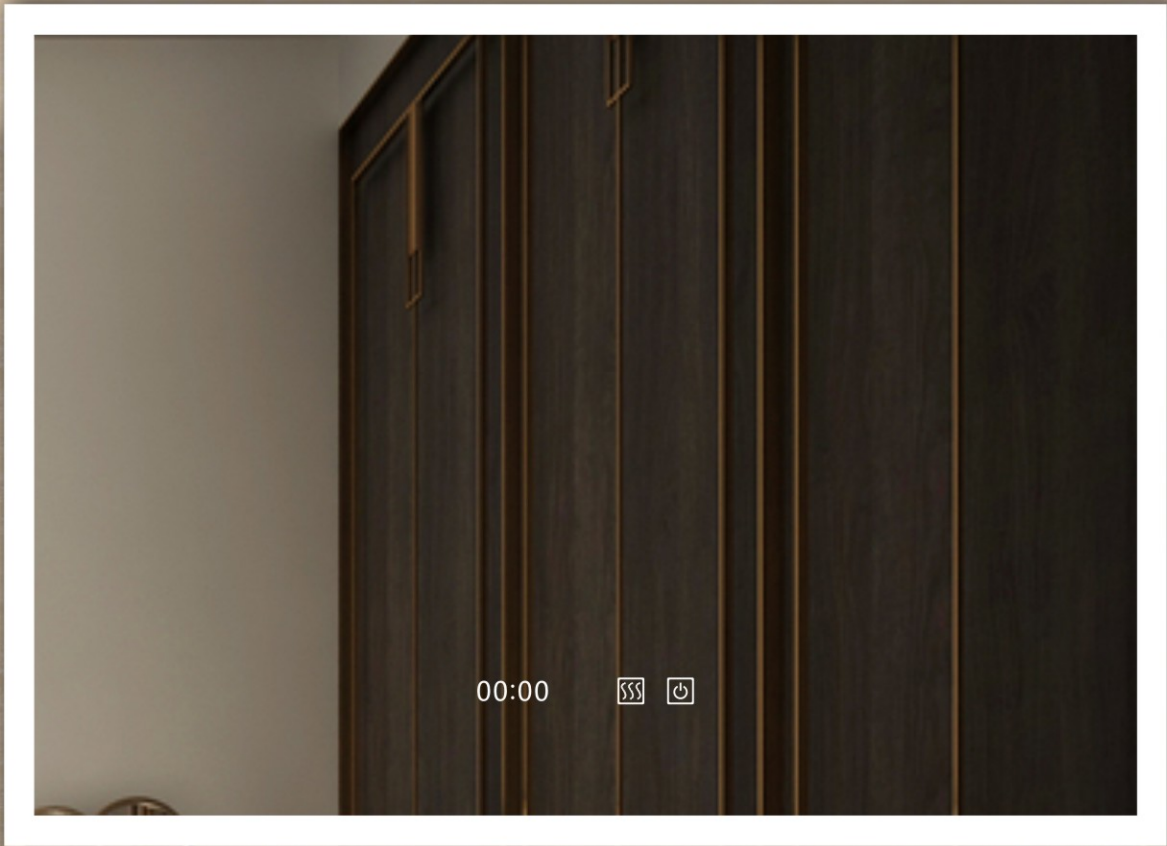


OPTIONAL FEATURES

- **CUSTOMIZED**
- **HAND SWEEP**
- **MUSIC**
- **DEFOGGING**
- **CCT CHANGE**
- **TEMPERATURE DISPLAY**
- **BLUETOOTH**
- **TIME DISPLAY**
- **CALL**

Basis function	Size(in)	Weight(lb)	Power(W)	Lumen(lm)	Input Voltage(V)	CRI	IP	LED Life Span	Warranty	Certification
Touch Switch Dimming	20*28	15	28	1504	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	24*32	19	33	1792	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	28*36	24	38	2080	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	32*40	29	43	2368	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	36*44	34	48	2656	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	

Long life,not easy to turn black
Copper free silver mirror

- Copper free,lead free lens
- 5mm high definition glass lens
- Silver ion coating
- Antioxidation technology
- Mirror grade sand blasting technology
- Waterproof coating

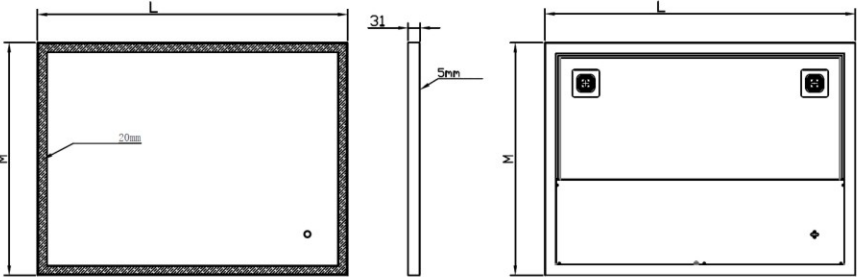



OPTIONAL FEATURES



CUSTOMIZED



HAND SWEEP



MUSIC



DEFOGGING



CCT CHANGE



TEMPERATURE DISPLAY



BLUETOOTH




TIME DISPLAY



CALL



Basis function	Size(in)	Weight(lb)	Power(W)	Lumen(lm)	Input Voltage(V)	CRI	IP	LED Life Span	Warranty	Certification
Touch Switch Dimming	20*28	14	31	1710	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	24*32	19	37	1998	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	28*36	23	42	2286	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	32*40	28	47	2574	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	36*44	34	52	2862	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	

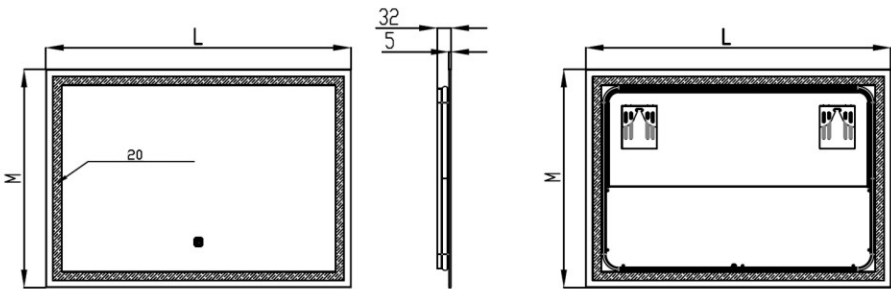



OPTIONAL FEATURES



CUSTOMIZED



HAND SWEEP



MUSIC



DEFOGGING



CCT CHANGE



TEMPERATURE DISPLAY



BLUETOOTH








TIME DISPLAY



CALL

Basis function	Size(in)	Weight(lb)	Power(W)	Lumen(lm)	Input Voltage(V)	CRI	IP	LED Life Span	Warranty	Certification
Touch Switch Dimming	20*28	15	19	787	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	24*32	19	21	902	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	28*36	24	23	1018	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	32*40	29	26	1133	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	36*44	34	29	1248	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	



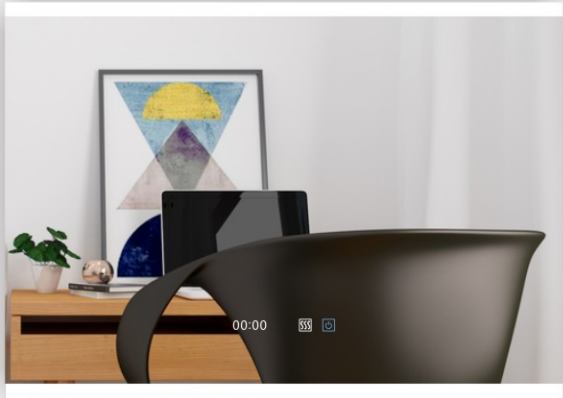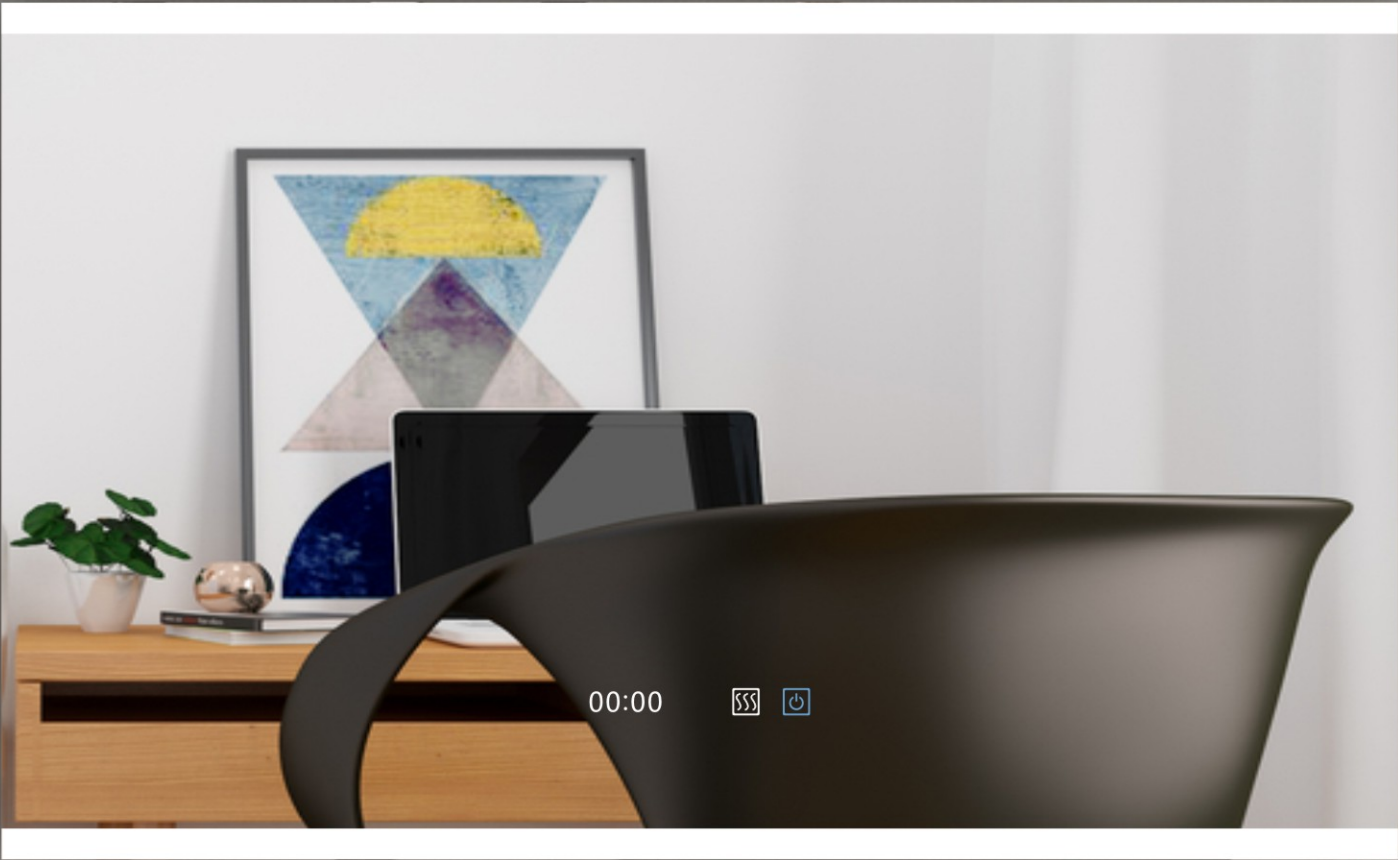


OPTIONAL FEATURES

- CUSTOMIZED
- HAND SWEEP
- MUSIC
- DEFOGGING
- CCT CHANGE
- 31°C TEMPERATURE DISPLAY
- BLUETOOTH
- TIME DISPLAY
- CALL

Basis function	Size(in)	Weight(lb)	Power(W)	Lumen(lm)	Input Voltage(V)	CRI	IP	LED Life Span	Warranty	Certification
Touch Switch Dimming	20*28	15	17	787	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	24*32	19	19	902	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	28*36	24	22	1018	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	32*40	29	25	1133	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	36*44	35	28	1248	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	

Long life, not easy to turn black
Copper free silver mirror

- Copper free, lead free lens
- 5mm high definition glass lens
- Silver ion coating
- Antioxidation technology
- Mirror grade sand blasting technology
- Waterproof coating

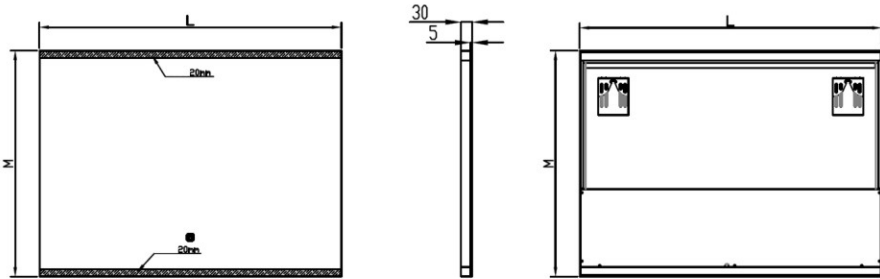





OPTIONAL FEATURES

-  CUSTOMIZED
-  HAND SWEEP
-  MUSIC
-  DEFOGGING
-  CCT CHANGE
-  31°C TEMPERATURE DISPLAY
-  BLUETOOTH
-  TIME DISPLAY
-  CALL


Basis function	Size(in)	Weight(lb)	Power(W)	Lumen(lm)	Input Voltage(V)	CRI	IP	LED Life Span	Warranty	Certification
Touch Switch Dimming	20*28	15	13	557	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	24*32	20	15	672	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	28*36	26	18	787	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	32*40	32	21	902	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	36*44	38	23	1018	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	

LED two-sided glow
Makeup mirror
atmosphere lamp integrated design
Front panel is a mirror front light design,
high CRI, can restore facial makeup;
The side panel light is designed with
ambient light, and the light is soft.

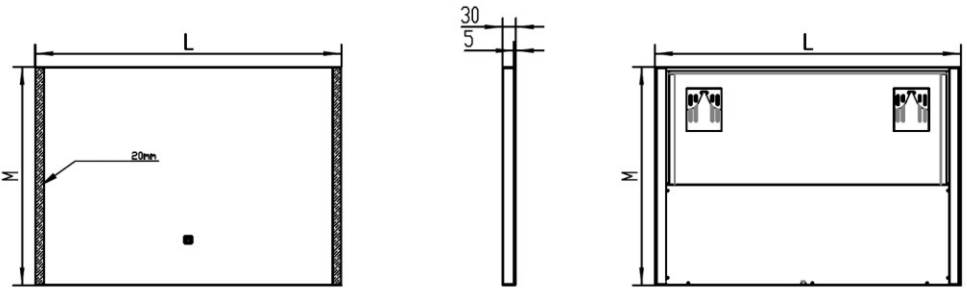

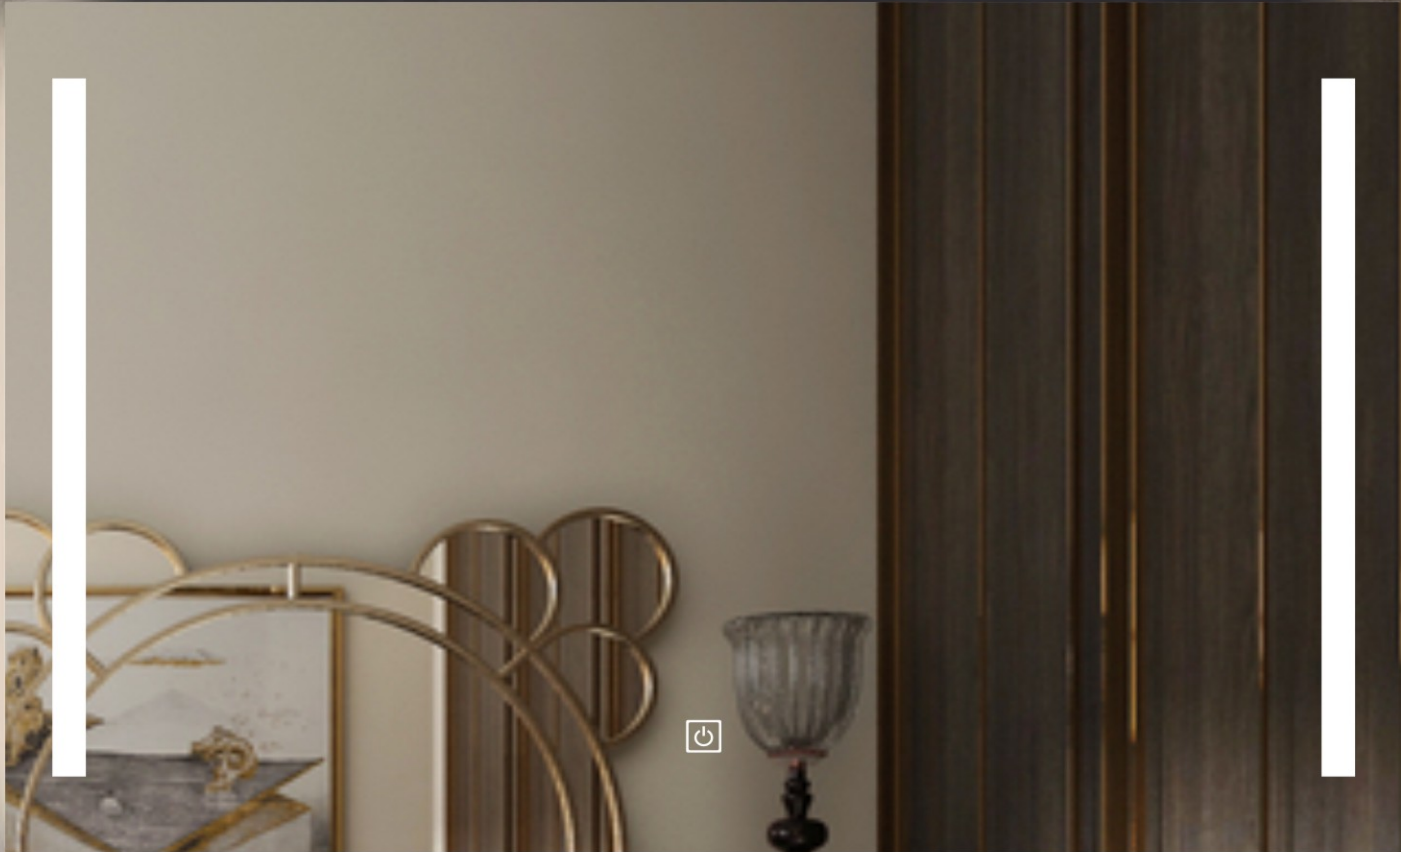

OPTIONAL FEATURES

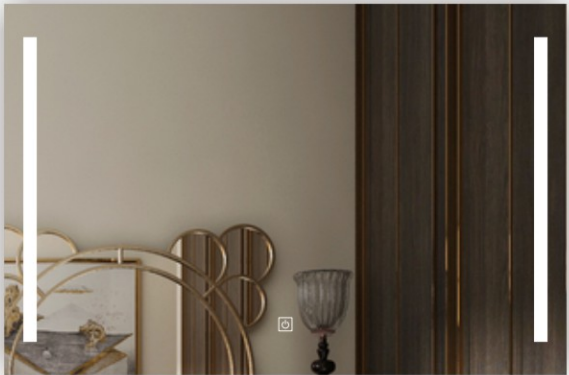



- CUSTOMIZED
- HAND SWEEP
- MUSIC
- DEFOGGING
- CCT CHANGE
- 31°C TEMPERATURE DISPLAY
- BLUETOOTH
- TIME DISPLAY
- CALL

Basis function	Size(in)	Weight(lb)	Power(W)	Lumen(lm)	Input Voltage(V)	CRI	IP	LED Life Span	Warranty	Certification
Touch Switch Dimming	20*28	15	13	557	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	24*32	19	15	672	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	28*36	24	18	787	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	32*40	29	21	902	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	36*44	35	23	1018	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	

Long life, not easy to turn black
Copper free silver mirror

- Copper free, lead free lens
- 5mm high definition glass lens
- Silver ion coating
- Antioxidation technology
- Mirror grade sand blasting technology
- Waterproof coating

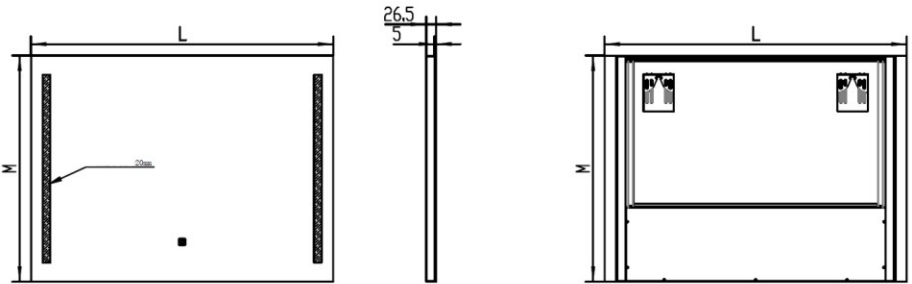


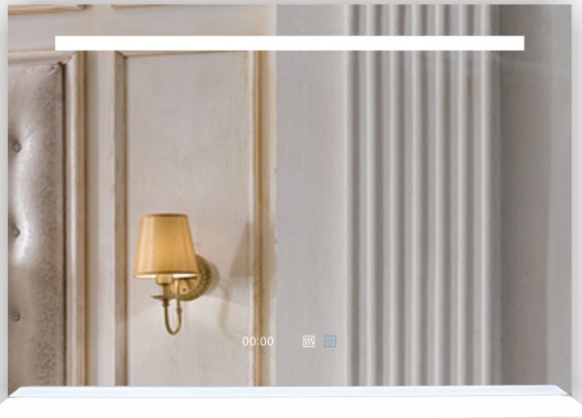



OPTIONAL FEATURES

-  CUSTOMIZED
-  HAND SWEEP
-  MUSIC
-  DEFOGGING
-  CCT CHANGE
-  31°C TEMPERATURE DISPLAY
-  BLUETOOTH
-  TIME DISPLAY
-  CALL

Basis function	Size(in)	Weight(lb)	Power(W)	Lumen(lm)	Input Voltage(V)	CRI	IP	LED Life Span	Warranty	Certification
Touch Switch Dimming	20*28	18	17	835	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	24*32	22	19	964	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	28*36	28	22	1094	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	32*40	33	25	1223	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	36*44	39	27	1353	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	

Adopt 360° whole area luminescence technology, use high strength acrylic material.



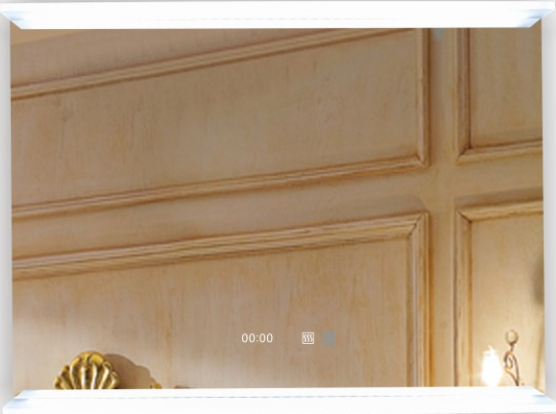


OPTIONAL FEATURES

- CUSTOMIZED
- HAND SWEEP
- MUSIC
- DEFOGGING
- CCT CHANGE
- 31°C TEMPERATURE DISPLAY
- BLUETOOTH
- TIME DISPLAY
- CALL

Basis function	Size(in)	Weight(lb)	Power(W)	Lumen(lm)	Input Voltage(V)	CRI	IP	LED Life Span	Warranty	Certification
Touch Switch Dimming	20*28	20	18	972	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	24*32	26	21	1116	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	28*36	32	23	1260	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	32*40	39	26	1404	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	36*44	46	28	1548	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	

Adopt 360° whole area luminescence technology, use high strength acrylic material.

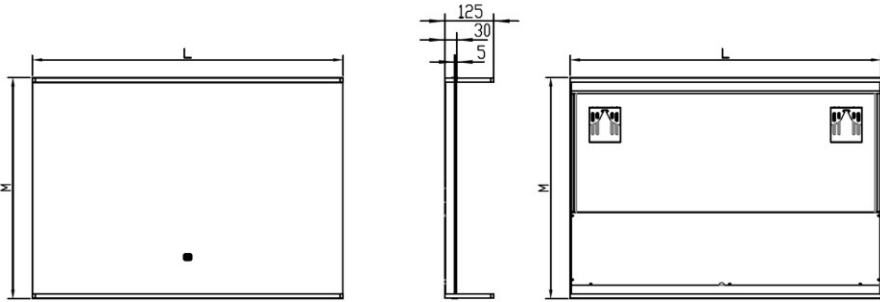



OPTIONAL FEATURES



CUSTOMIZED



HAND SWEEP



MUSIC



DEFOGGING



CCT CHANGE



TEMPERATURE DISPLAY



BLUETOOTH





TIME DISPLAY



CALL

Basis function	Size(in)	Weight(lb)	Power(W)	Lumen(lm)	Input Voltage(V)	CRI	IP	LED Life Span	Warranty	Certification
Touch Switch Dimming	Φ24	12	22	1205	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	Φ28	16	26	1440	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	Φ32	20	30	1626	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	Φ36	24	35	1889	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	Φ40	30	38	2104	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	



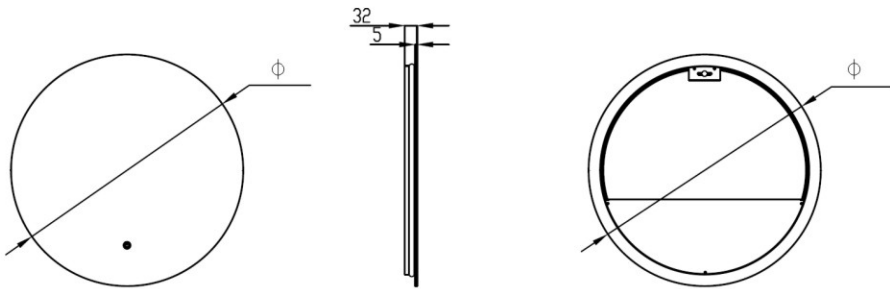





OPTIONAL FEATURES

- CUSTOMIZED
- HAND SWEEP
- MUSIC
- DEFOGGING
- CCT CHANGE
- 31°C TEMPERATURE DISPLAY
- BLUETOOTH
- TIME DISPLAY
- CALL

Basis function	Size(in)	Weight(lb)	Power(W)	Lumen(lm)	Input Voltage(V)	CRI	IP	LED Life Span	Warranty	Certification
Touch Switch Dimming	Φ24	12	22	1205	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	Φ28	16	26	1440	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	Φ32	20	30	1626	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	Φ36	24	35	1889	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	Φ40	30	38	2104	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	


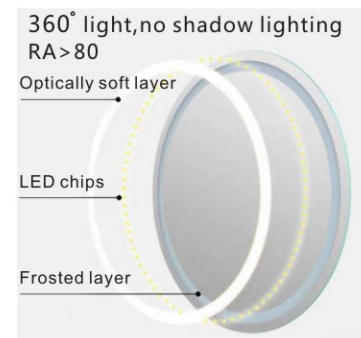




OPTIONAL FEATURES

-  CUSTOMIZED
-  HAND SWEEP
-  MUSIC
-  DEFOGGING
-  CCT CHANGE
-  31°C TEMPERATURE DISPLAY
-  BLUETOOTH
-  TIME DISPLAY
-  CALL

Basis function	Size(in)	Weight(lb)	Power(W)	Lumen(lm)	Input Voltage(V)	CRI	IP	LED Life Span	Warranty	Certification
Touch Switch Dimming	Φ24	12	20	1096	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	Φ28	15	24	1329	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	Φ32	19	28	1545	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	Φ36	24	33	1781	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	Φ40	29	36	1993	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	

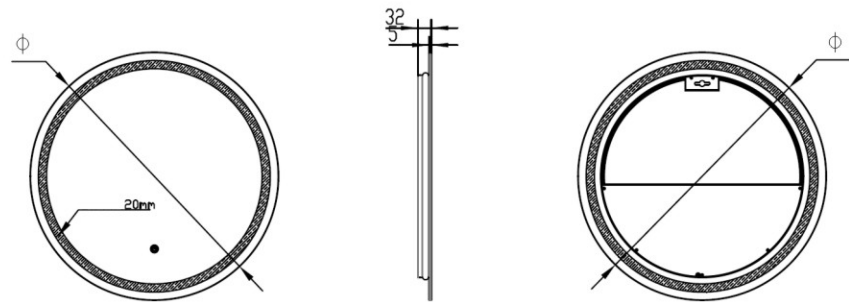






OPTIONAL FEATURES

- CUSTOMIZED
- HAND SWEEP
- MUSIC
- DEFOGGING
- CCT CHANGE
- 31°C TEMPERATURE DISPLAY
- BLUETOOTH
- TIME DISPLAY
- CALL

Basis function	Size(in)	Weight(lb)	Power(W)	Lumen(lm)	Input Voltage(V)	CRI	IP	LED Life Span	Warranty	Certification
Touch Switch Dimming	Φ24	11	25	1292	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	Φ28	12	29	1511	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	Φ32	14	34	1734	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	Φ36	16	38	1943	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	Φ40	18	42	2158	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	

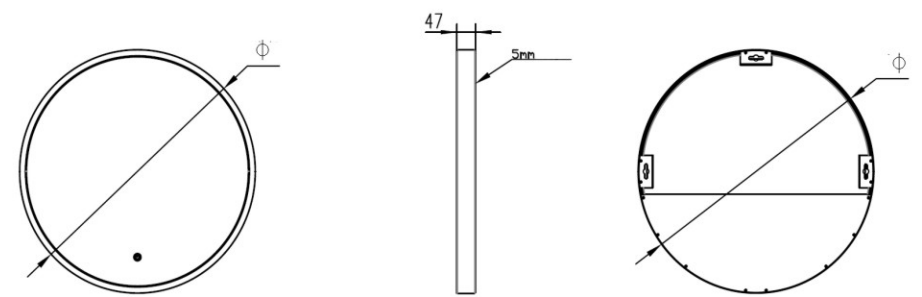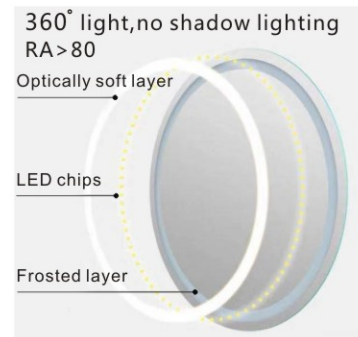


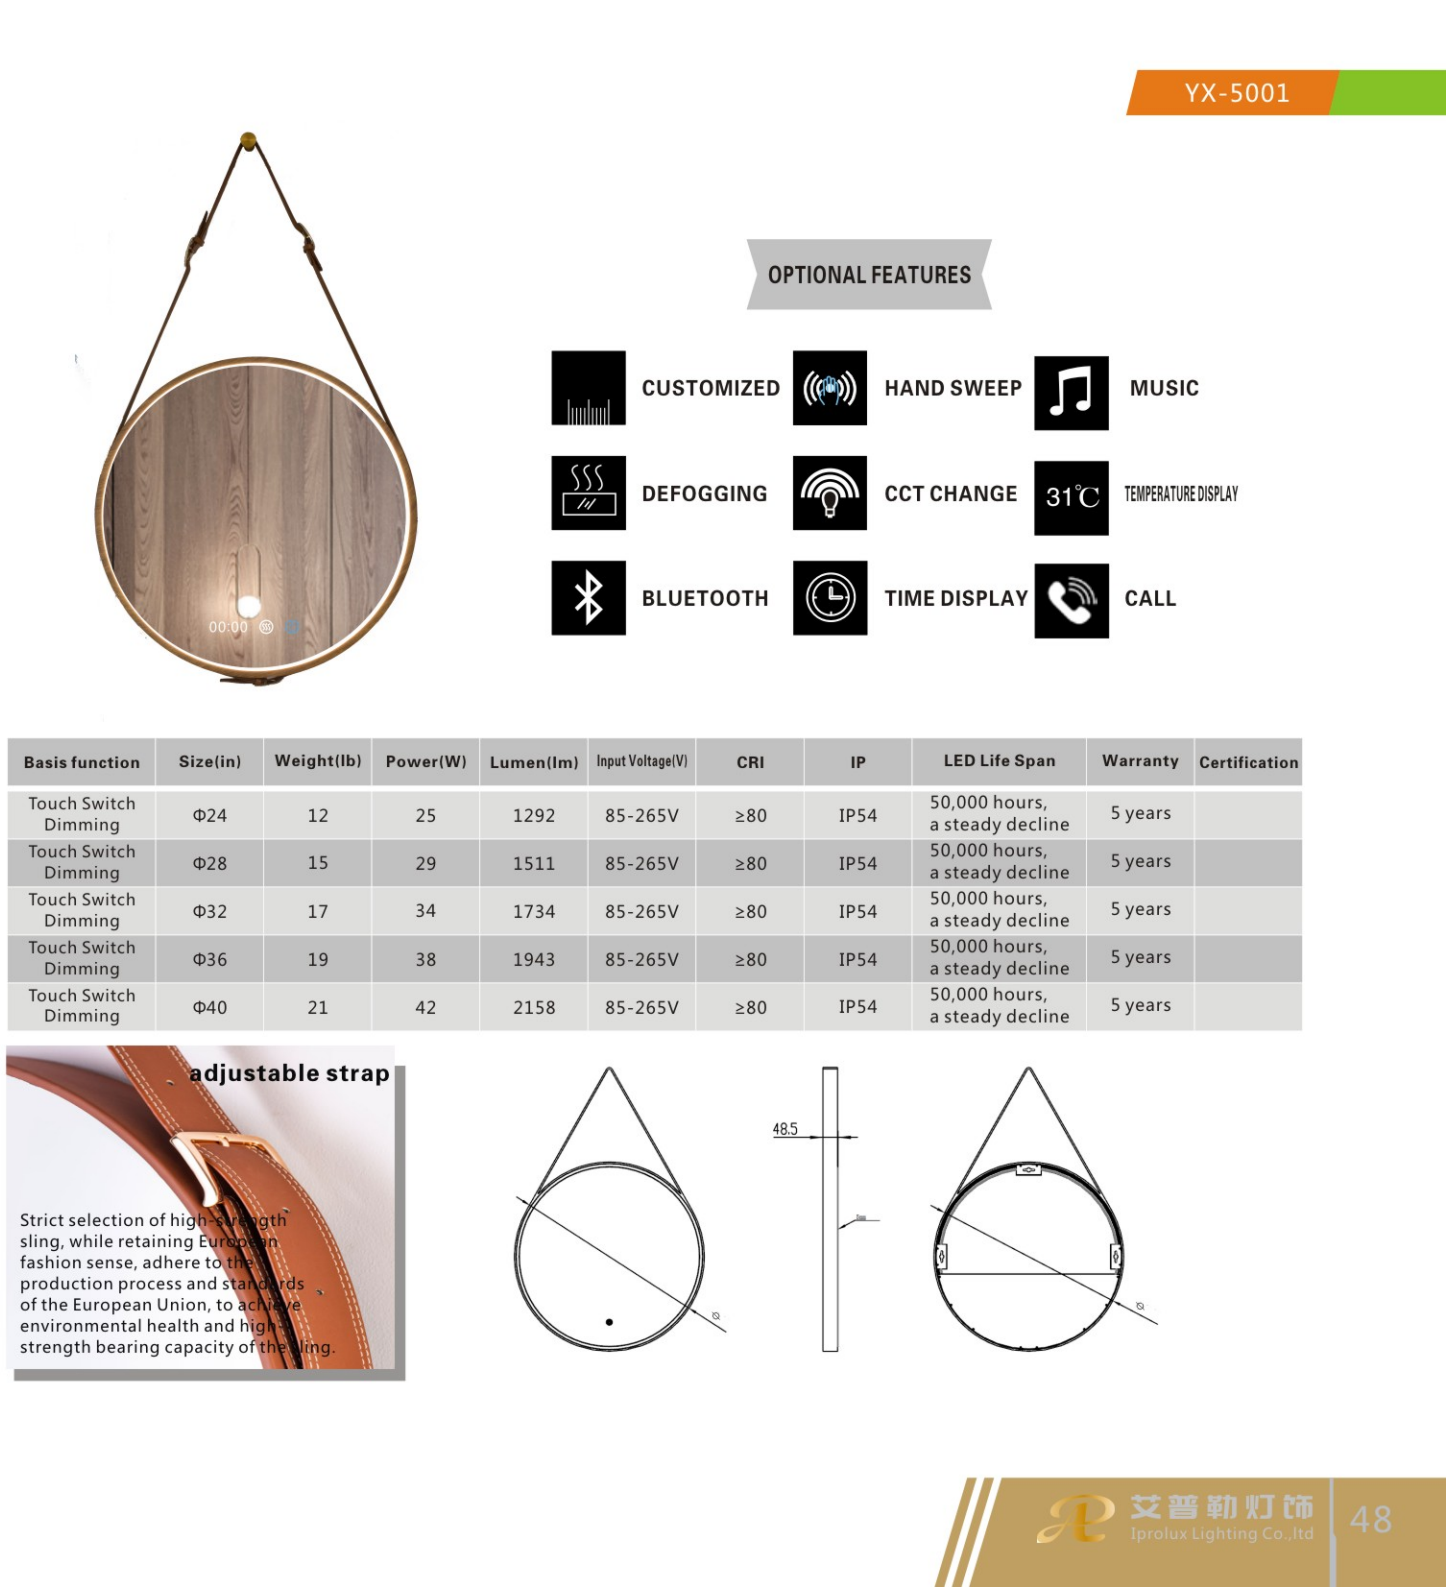

OPTIONAL FEATURES


-  CUSTOMIZED
-  HAND SWEEP
-  MUSIC
-  DEFOGGING
-  CCT CHANGE
-  31°C TEMPERATURE DISPLAY
-  BLUETOOTH
-  TIME DISPLAY
-  CALL

Basis function	Size(in)	Weight(lb)	Power(W)	Lumen(lm)	Input Voltage(V)	CRI	IP	LED Life Span	Warranty	Certification
Touch Switch Dimming	Φ24	12	25	1292	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	Φ28	15	29	1511	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	Φ32	17	34	1734	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	Φ36	19	38	1943	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	Φ40	21	42	2158	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	

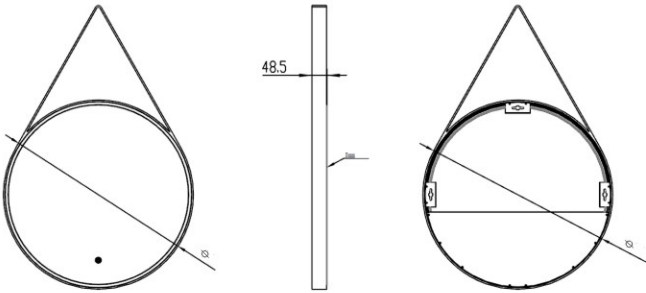



OPTIONAL FEATURES

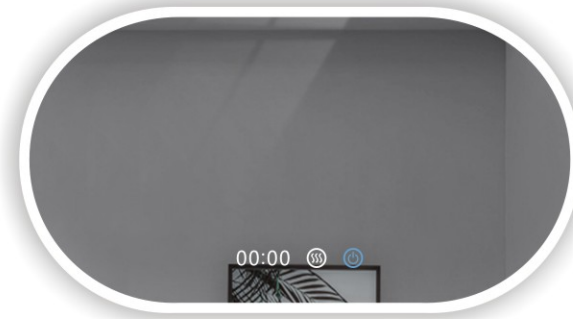


- CUSTOMIZED
- HAND SWEEP
- MUSIC
- DEFOGGING
- CCT CHANGE
- 31°C TEMPERATURE DISPLAY
- BLUETOOTH
- TIME DISPLAY
- CALL

Basis function	Size(in)	Weight(lb)	Power(W)	Lumen(lm)	Input Voltage(V)	CRI	IP	LED Life Span	Warranty	Certification
Touch Switch Dimming	32*20	14	28	1522	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	36*24	19	31	1675	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	

Dedicated LED Strip
Energy saving Waterproof Long life

European Union standard LED aluminum base wick, lamp bead layout is uniform and reasonable, good light transmission. Aluminum-based wick has good optical reflection effect, long life can effectively reduce light aging loss, improve light efficiency.

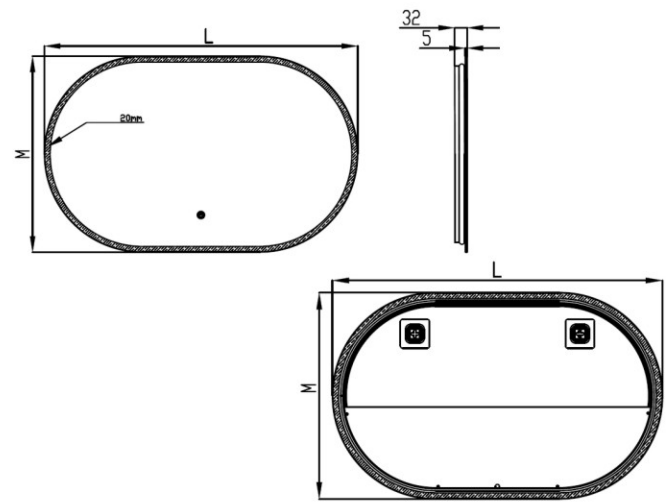



OPTIONAL FEATURES

CUSTOMIZED

HAND SWEEP

MUSIC

DEFOGGING

CCT CHANGE

31°C TEMPERATURE DISPLAY

BLUETOOTH

TIME DISPLAY

CALL

Basis function	Size(in)	Weight(lb)	Power(W)	Lumen(lm)	Input Voltage(V)	CRI	IP	LED Life Span	Warranty	Certification
Touch Switch Dimming	32*20	13	28	1522	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	36*24	18	31	1675	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	



OPTIONAL FEATURES



CUSTOMIZED



HAND SWEEP



MUSIC



DEFOGGING



CCT CHANGE



31°C TEMPERATURE DISPLAY



BLUETOOTH



TIME DISPLAY





CALL


Dedicated LED Strip
Energy saving Waterproof Long life



European Union standard LED aluminum base wick, lamp bead layout is uniform and reasonable, good light transmission. Aluminum-based wick has good optical reflection effect, long life can effectively reduce light aging loss, improve light efficiency.

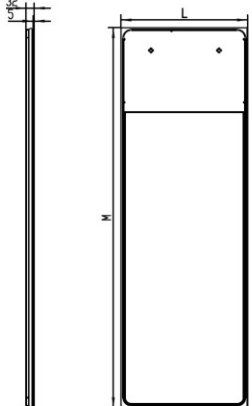

Basis function	Size(in)	Weight(lb)	Power(W)	Lumen(lm)	Input Voltage(V)	CRI	IP	LED Life Span	Warranty	Certification
Touch Switch Dimming	60*16	21	41	2224	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	60*20	26	43	2335	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	

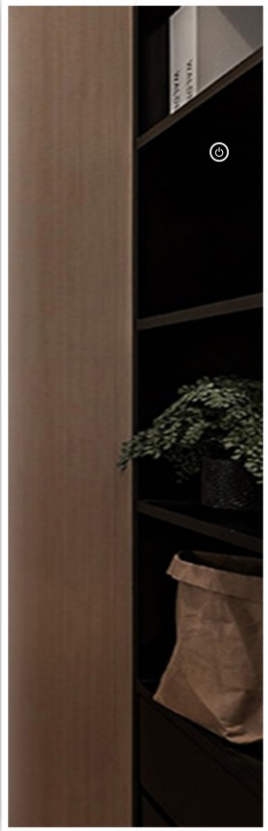

OPTIONAL FEATURES



CUSTOMIZED



HAND SWEEP



MUSIC



DEFOGGING



CCT CHANGE



31°C TEMPERATURE DISPLAY



BLUETOOTH



TIME DISPLAY




CALL

Dedicated LED Strip

Energy saving Waterproof Long life



European Union standard LED aluminum base wick, lamp bead layout is uniform and reasonable, good light transmission. Aluminum-based wick has good optical reflection effect, long life can effectively reduce light aging loss, improve light efficiency.

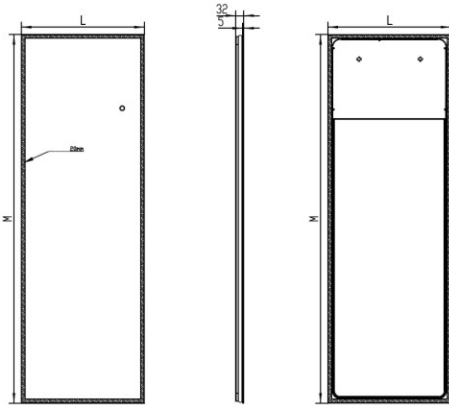

Basis function	Size(in)	Weight(lb)	Power(W)	Lumen(lm)	Input Voltage(V)	CRI	IP	LED Life Span	Warranty	Certification
Touch Switch Dimming	60*16	21	41	2224	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	60*20	26	43	2335	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	



Dressing Mirror



OPTIONAL FEATURES



CUSTOMIZED



HAND SWEEP



MUSIC



DEFOGGING



CCT CHANGE



31°C TEMPERATURE DISPLAY



BLUETOOTH




TIME DISPLAY



CALL

Dedicated LED Strip
Energy saving Waterproof Long life

European Union standard LED aluminum base wick, lamp bead layout is uniform and reasonable, good light transmission. Aluminum-based wick has good optical reflection effect, long life can effectively reduce light aging loss, improve light efficiency.

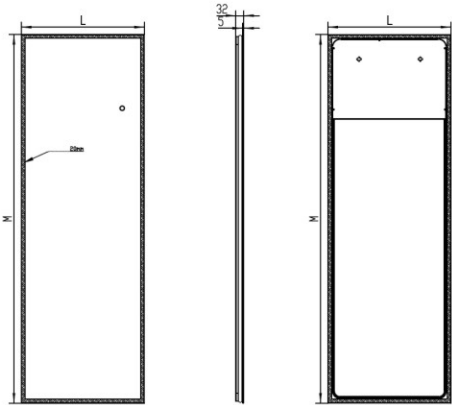

Basis function	Size(in)	Weight(lb)	Power(W)	Lumen(lm)	Input Voltage(V)	CRI	IP	LED Life Span	Warranty	Certification
Touch Switch Dimming	60*16	21	39	2160	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	60*20	25	42	2281	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	



Dressing Mirror

CY-2203

OPTIONAL FEATURES



CUSTOMIZED



HAND SWEEP



MUSIC



DEFOGGING



CCT CHANGE



TEMPERATURE DISPLAY



BLUETOOTH



TIME DISPLAY




CALL

Dedicated LED Strip


Energy saving Waterproof Long life



European Union standard LED aluminum base wick, lamp bead layout is uniform and reasonable, good light transmission. Aluminum-based wick has good optical reflection effect, long life can effectively reduce light aging loss, improve light efficiency.

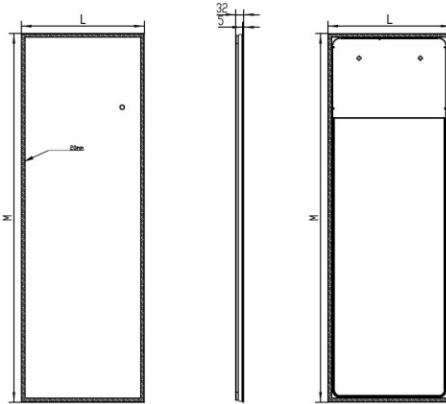

Basis function	Size(in)	Weight(lb)	Power(W)	Lumen(lm)	Input Voltage(V)	CRI	IP	LED Life Span	Warranty	Certification
Touch Switch Dimming	60*16	23	36	1709	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	60*20	27	36	1709	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	

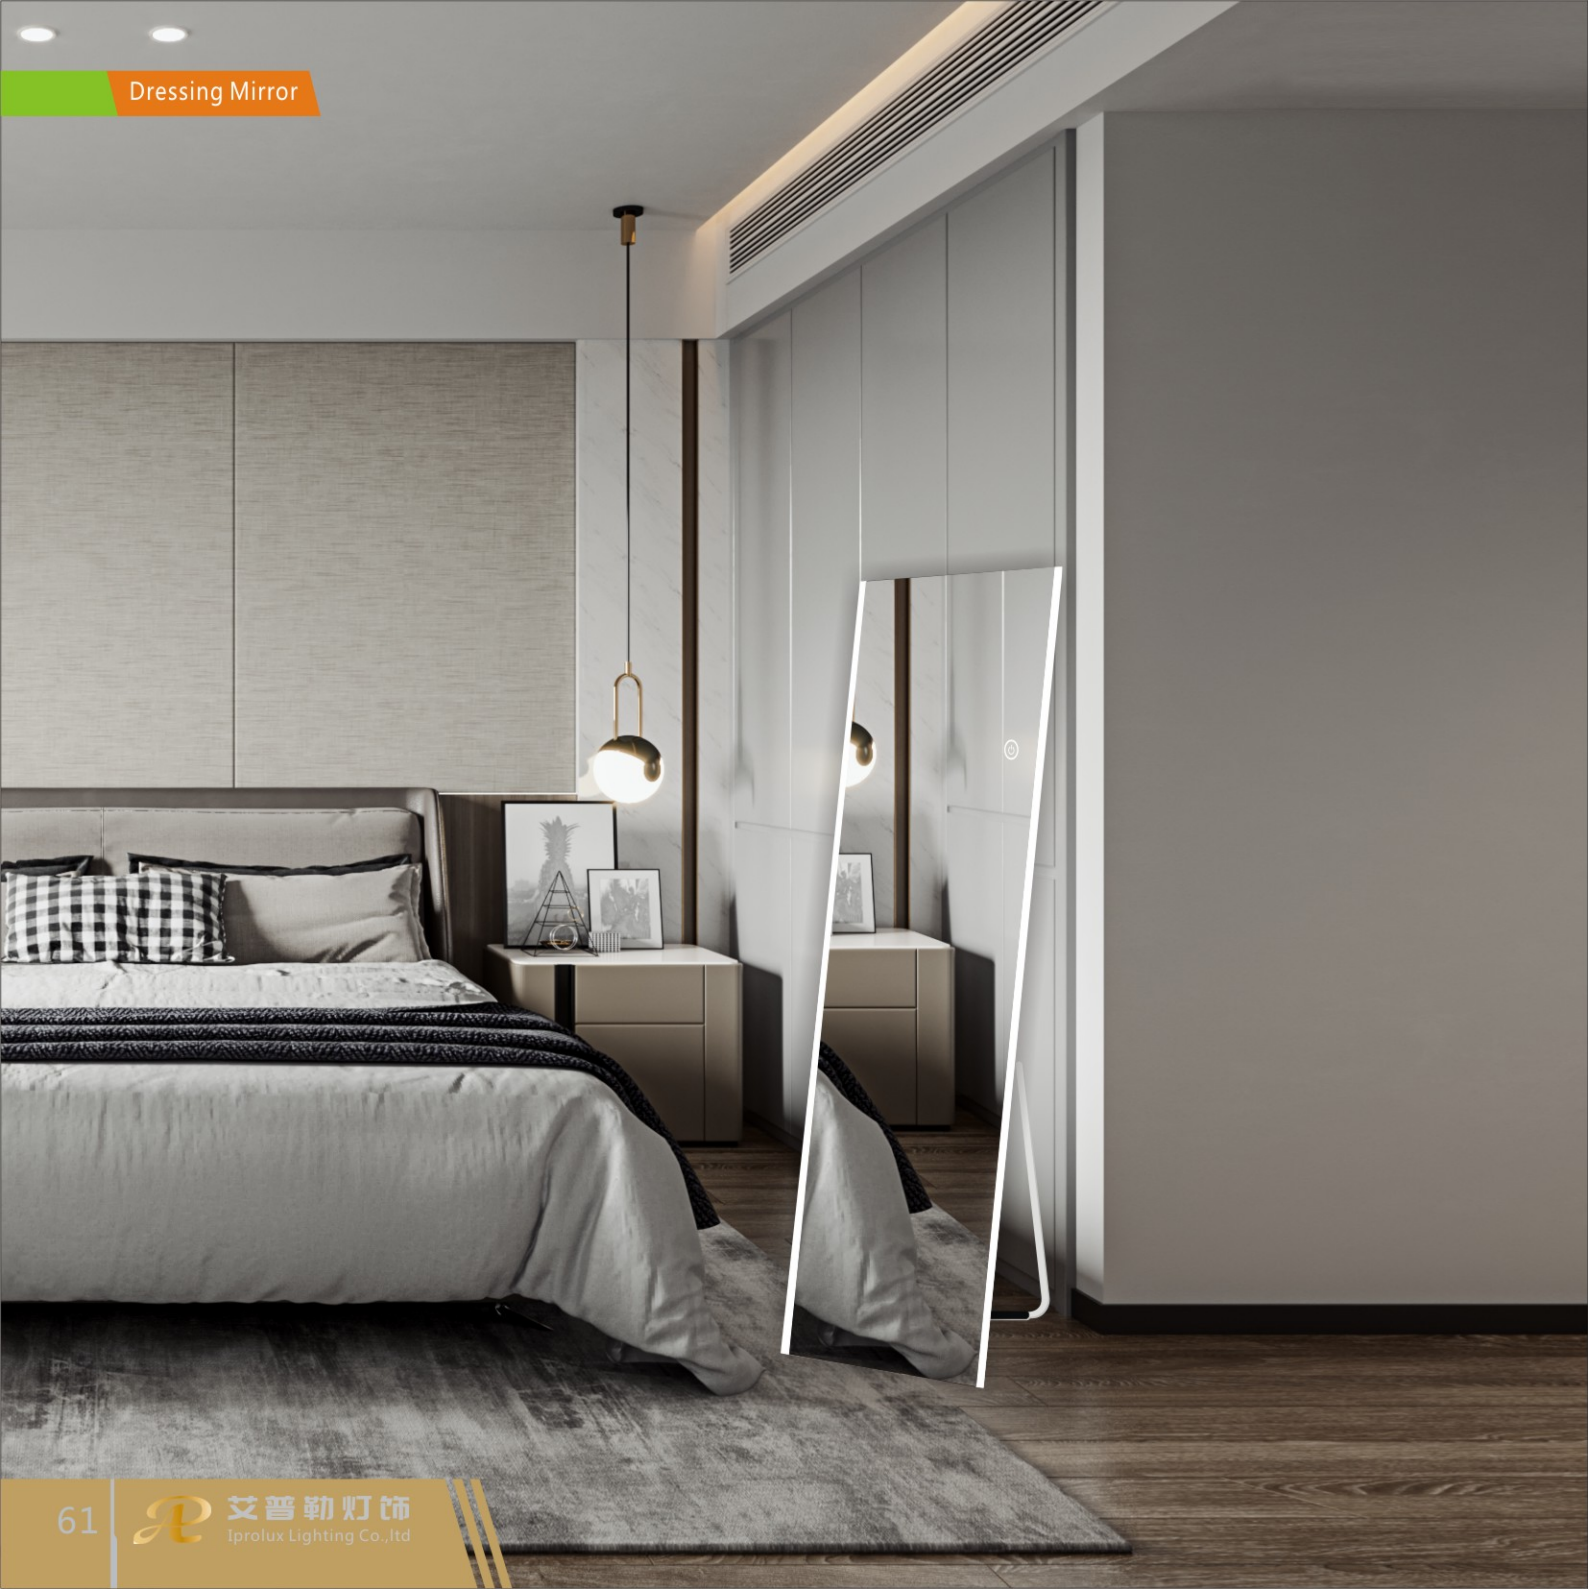

OPTIONAL FEATURES



CUSTOMIZED



HAND SWEEP



MUSIC



DEFOGGING



CCT CHANGE



31°C TEMPERATURE DISPLAY



BLUETOOTH



TIME DISPLAY




CALL

Dedicated LED Strip

Energy saving Waterproof Long life



European Union standard LED aluminum base wick, lamp bead layout is uniform and reasonable, good light transmission. Aluminum-based wick has good optical reflection effect, long life can effectively reduce light aging loss, improve light efficiency.

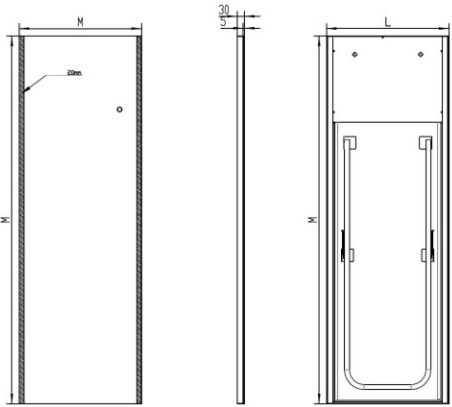

Basis function	Size(in)	Weight(lb)	Power(W)	Lumen(lm)	Input Voltage(V)	CRI	IP	LED Life Span	Warranty	Certification
Touch Switch Dimming	60*16	25	36	1709	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	60*20	29	36	1709	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	



OPTIONAL FEATURES



CUSTOMIZED



HAND SWEEP



MUSIC



DEFOGGING



CCT CHANGE



31°C TEMPERATURE DISPLAY



BLUETOOTH




TIME DISPLAY



CALL

Dedicated LED Strip
Energy saving Waterproof Long life

European Union standard LED aluminum base wick, lamp bead layout is uniform and reasonable, good light transmission. Aluminum-based wick has good optical reflection effect, long life can effectively reduce light aging loss, improve light efficiency.

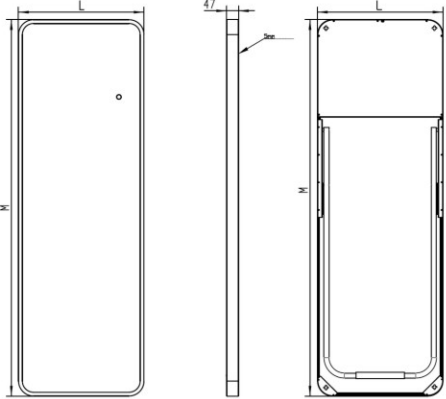

Basis function	Size(in)	Weight(lb)	Power(W)	Lumen(lm)	Input Voltage(V)	CRI	IP	LED Life Span	Warranty	Certification
Touch Switch Dimming	60*16	28	47	2542	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	60*20	32	50	2584	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	



Dressing Mirror

CY-6203




OPTIONAL FEATURES

- **CUSTOMIZED**
- **HAND SWEEP**
- **MUSIC**
- **DEFOGGING**
- **CCT CHANGE**
- **TEMPERATURE DISPLAY**
- **BLUETOOTH**
- **TIME DISPLAY**
- **CALL**

Dedicated LED Strip
Energy saving Waterproof Long life



European Union standard LED aluminum base wick, lamp bead layout is uniform and reasonable, good light transmission. Aluminum-based wick has good optical reflection effect, long life can effectively reduce light aging loss, improve light efficiency.

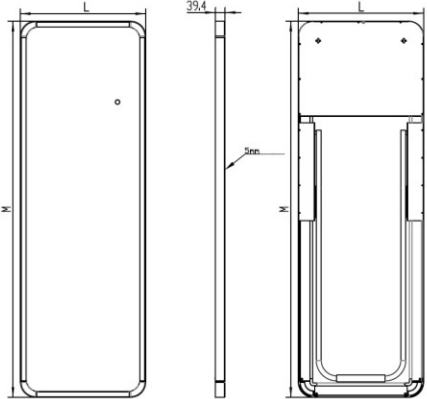

Basis function	Size(in)	Weight(lb)	Power(W)	Lumen(lm)	Input Voltage(V)	CRI	IP	LED Life Span	Warranty	Certification
Touch Switch Dimming	60*16	28	45	2476	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	60*20	32	48	2620	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	




OPTIONAL FEATURES


- CUSTOMIZED
- HAND SWEEP
- MUSIC
- DEFOGGING
- CCT CHANGE
- 31°C TEMPERATURE DISPLAY
- BLUETOOTH
- TIME DISPLAY
- CALL

Dedicated LED Strip
Energy saving Waterproof Long life

European Union standard LED aluminum base wick, lamp bead layout is uniform and reasonable, good light transmission. Aluminum-based wick has good optical reflection effect, long life can effectively reduce light aging loss, improve light efficiency.

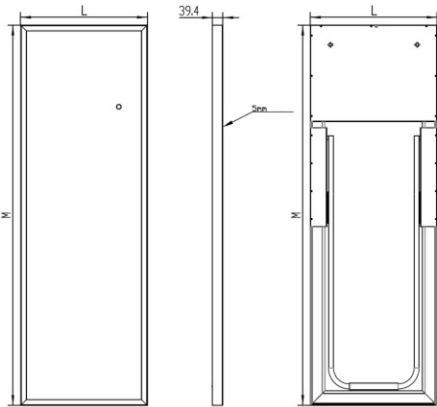

Basis function	Size(in)	Weight(lb)	Power(W)	Lumen(lm)	Input Voltage(V)	CRI	IP	LED Life Span	Warranty	Certification
Touch Switch Dimming	60*16	28	45	2476	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	60*20	33	48	2620	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	

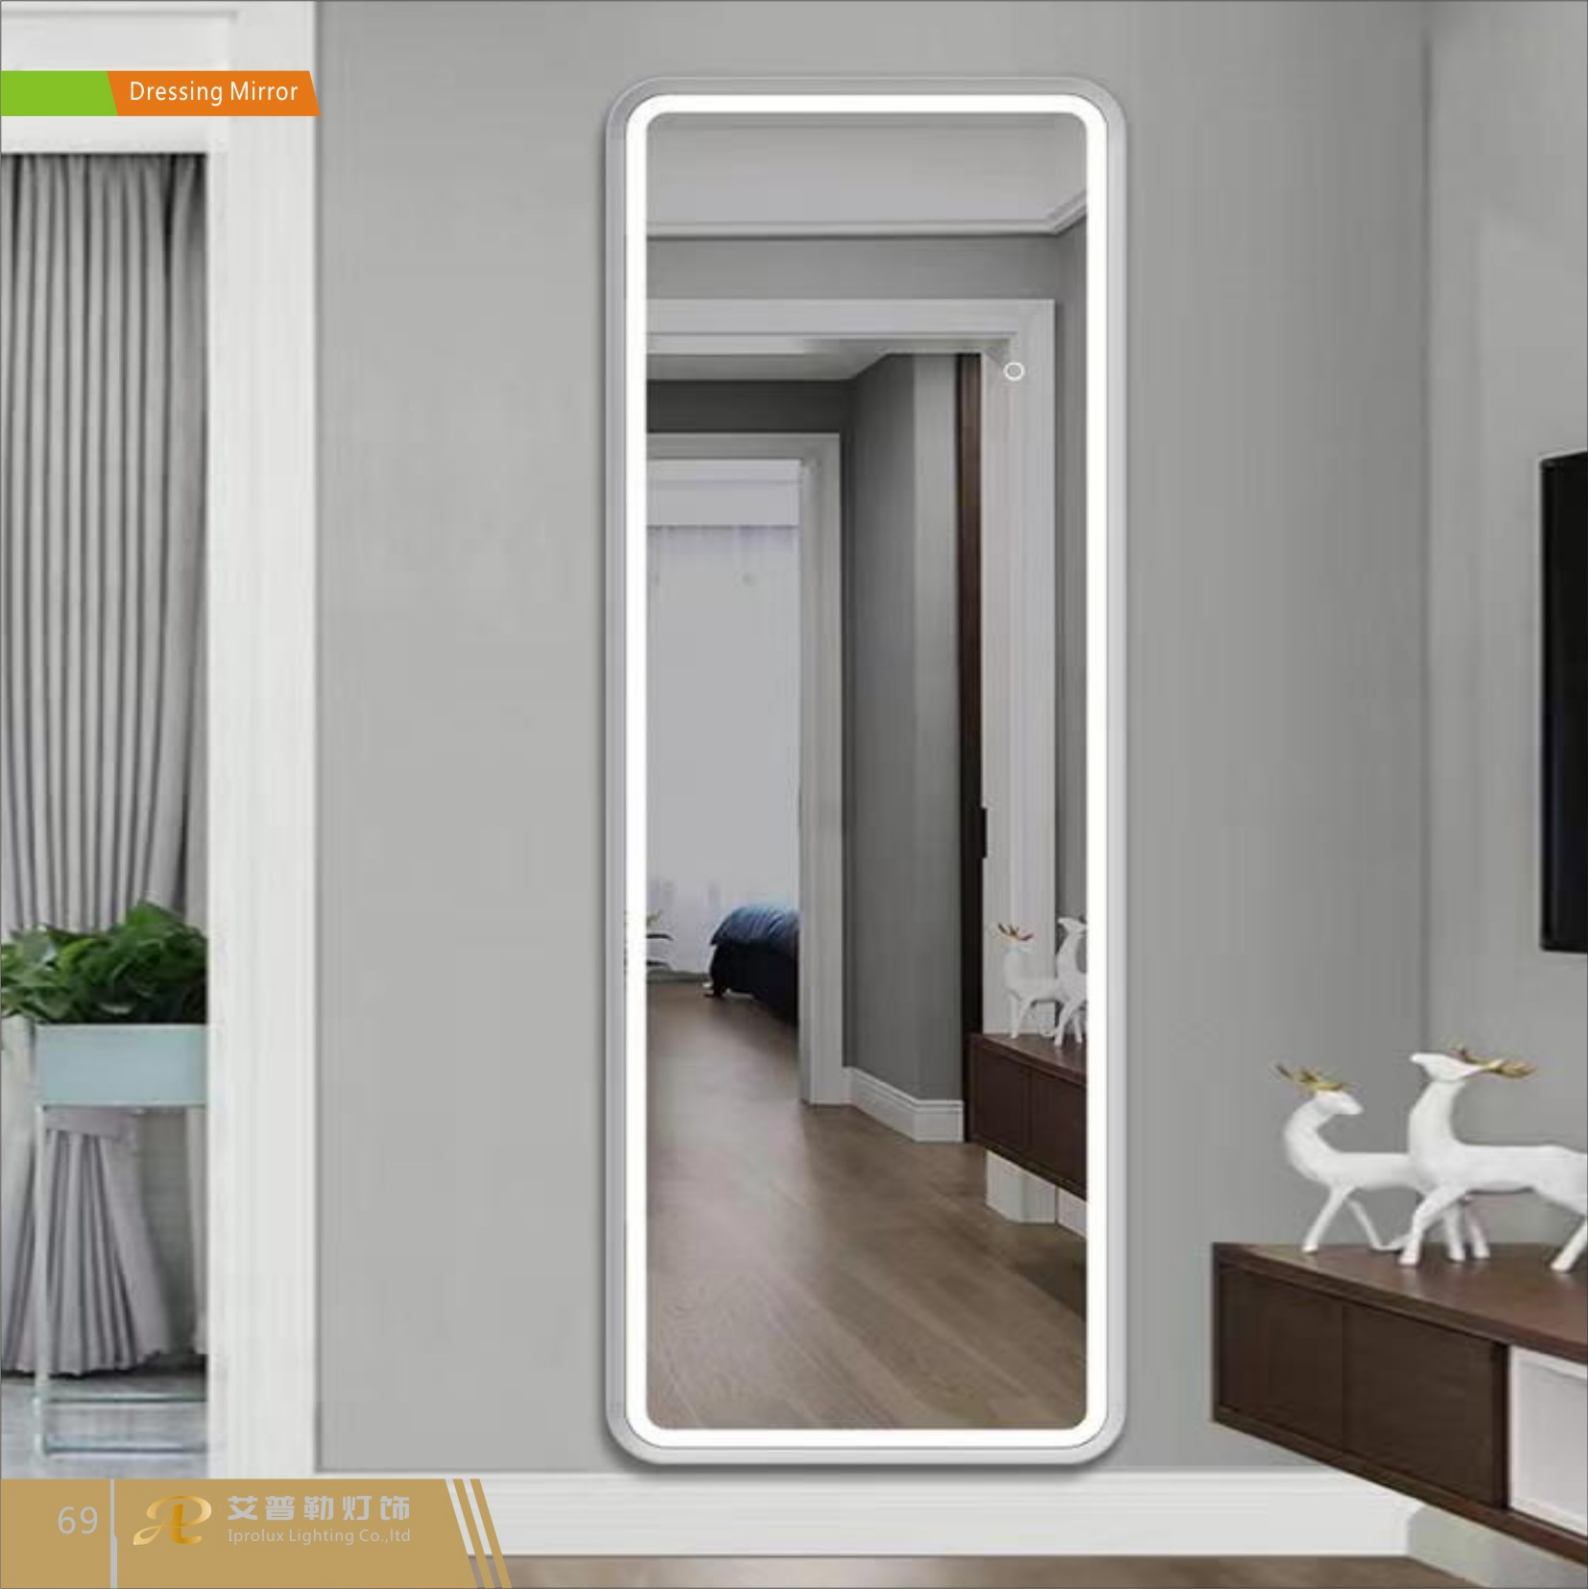

Dressing Mirror

CY-6205

OPTIONAL FEATURES



CUSTOMIZED



HAND SWEEP



MUSIC



DEFOGGING



CCT CHANGE



TEMPERATURE DISPLAY



BLUETOOTH



TIME DISPLAY




CALL

Dedicated LED Strip

Energy saving Waterproof Long life



European Union standard LED aluminum base wick, lamp bead layout is uniform and reasonable, good light transmission. Aluminum-based wick has good optical reflection effect, long life can effectively reduce light aging loss, improve light efficiency.

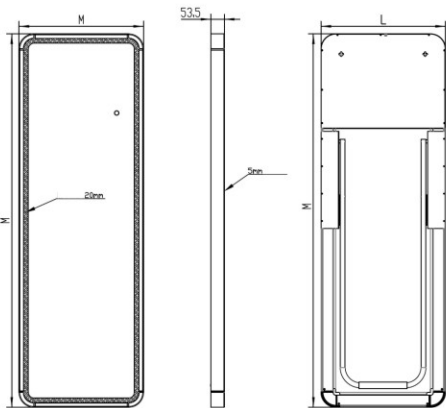

Basis function	Size(in)	Weight(lb)	Power(W)	Lumen(lm)	Input Voltage(V)	CRI	IP	LED Life Span	Warranty	Certification
Touch Switch Dimming	60*16	30	45	2377	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	60*20	34	47	2516	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	



Dressing Mirror

Optional Features

CUSTOMIZED

HAND SWEEP

MUSIC

DEFOGGING

CCT CHANGE

31°C TEMPERATURE DISPLAY

BLUETOOTH

TIME DISPLAY

CALL

Dedicated LED Strip
Energy saving Waterproof Long life

European Union standard LED aluminum base wick, lamp bead layout is uniform and reasonable, good light transmission. Aluminum-based wick has good optical reflection effect, long life can effectively reduce light aging loss, improve light efficiency.

Basis function	Size(in)	Weight(lb)	Power(W)	Lumen(lm)	Input Voltage(V)	CRI	IP	LED Life Span	Warranty	Certification
Touch Switch Dimming	60*16	30	45	2377	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	
Touch Switch Dimming	60*20	34	47	2516	85-265V	≥80	IP54	50,000 hours, a steady decline	5 years	

艾普勒灯饰
Iprolux Lighting Co.,Ltd

72